

For Fabrication Drawing of this enclosure see DWG #0020

WEB DRAWING (NOT FOR FABRICATION)

REVISIONS **DESCRIPTION DATE** Web Drawing per DR-00423 11/10/2011 Upddate with new components and DWG template per DR-00917 5/2/2014

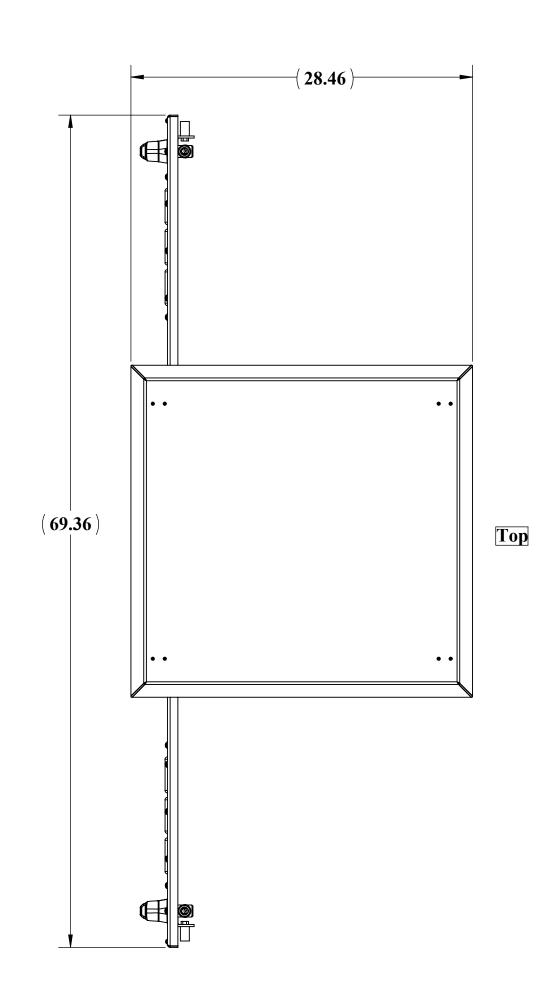

Front

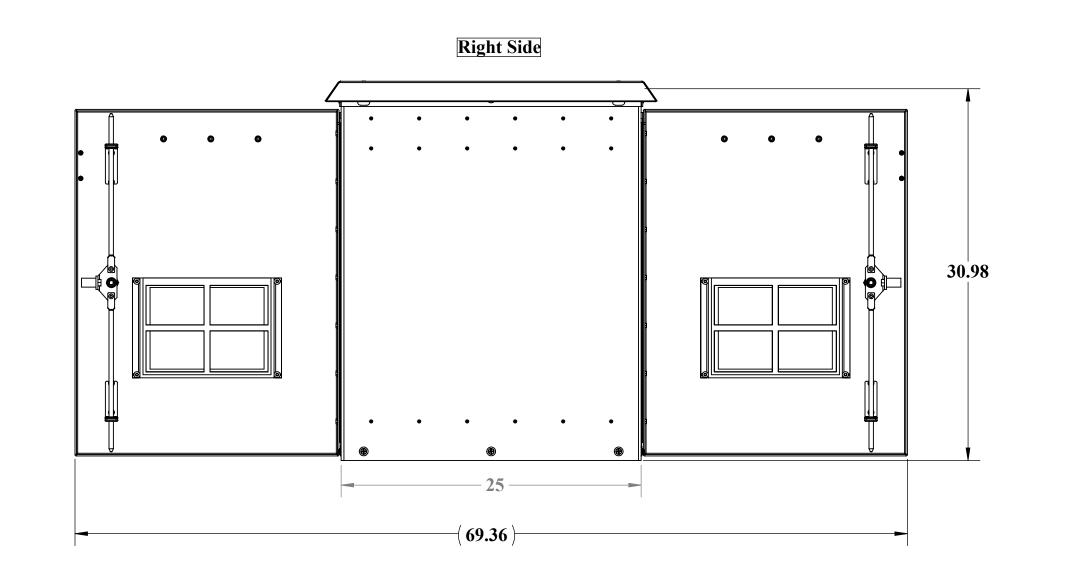

## WEB DRAWING (NOT FOR FABRICATION)

NAME DATE



	UNLESS OTHERWISE	E SPECIFIE
	DIMENSIONS ARE IN INCHES	
•	ANGULAR:	±1°
	FRACTIONAL/NO DECIMAL: ONE PLACE DECIMAL:	±0.1250 + 0.0625
•	TWO PLACE DECIMAL:	± 0.0623 + 0.0200
"	THREE PLACE DECIMAL:	± 0.0150
	ALL HOLES: ±0.0030 Ø.	
	MATERIAL THICKNESS IS: 0.1	25"
NY	MATERIAL: Varies	
52	PAINT: Varies	
2	DO NOT SCALE DRAWIN	

OD-30DX Drawn by: EdwardW 05/12/14 Enclosure, OD, 30, DX **Q.A. Appr.:** ddb3rma 05/16/14 Prod.Mgr.: ClarkK 05/16/14 SCALE: 1:32 WEIGHT: 93 lbs. SHEET 1 OF 2

DDB Unlimited Inc.

NOTES: UNLESS OTHERWISE SPECIFIED

1. DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5M 2. DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED 3. THIS IS A SUPPLEMENTAL DRAWING AND MAY NOT BE FULLY DIMENSIONED. THE NOTES, TOLERANCES, AND SPECIAL INSTRUCTIONS ARE TO BE USED ALONG WITH THE LATEST REVISION OF THE SOLID DATABASE. THE PART OR ASSEMBLY

IS TO BE CONTROLLED PER THE ELECTRONIC FILE. 4. ALL PEM STUDS SHALL BE FHS FOR STAINLESS ENCLOSURES AND FHA FOR ALUMINUM. 5. ALL EXTERIOR WASHERS SHALL BE SEALING WASHERS.
6. THE FOLLOWING WEATHER STRIPPING SHALL BE USED FOR THE FOLLOWING APPLICATIONS:
DOOR LIP - TRIMLOCK 3100B3X1/8C
FAN PLATES - STICKER 1/4 2/4

AC'S - STICKER-TITE 1/4x3/4

7. CUSTOM ENCLOSURES SHALL HAVE SECURITY TORX FOR ALL EXTERIOR HARDWARE. 8. SYMBOL DENOTES CRITICAL DIMENSIONS AND MUST BE INSPECTED.
9. REMOVE ALL BURRS AND SHARP EDGES 0.025" MAX RADIUS OR CHAMFER

10. DO NOT DEBURR PRESS FIT HOLES 11. DIMENSIONS SHALL APPLY AFTER ALODINE, PAINT, FINISH, OR COAT IS APPLIED 12. INSTALL PRESS FIT STANDOFFS, STUDS, AND NUTS IN ACCORDANCE WITH THE

MANUFACTURER'S SPECIFICATIONS. 13. ALL OPEN HOLES SHALL BE POPULATED WITH APPLICABLE HARDWARE. 14. IDENTIFY PART WITH PART NUMBER, REVISION LETTER AND SERIAL NUMBER
15. FINISHED PART TO BE FREE OF OILS, LUBRICANTS, AND OTHER CONTAMINANTS

A 16. NO NYLON LOCK NUTS TO BE USED ON ANY PEM STUDS, UNLESS OTHERWISE SPECIFIED.
17. ALL PEM STUDS WILL BE SECURED WITH EXTERNAL TOOTH WASHER AND STANDARD NUTS. 18. TOLERANCES, UNLESS OTHERWISE SPECIFIED:

a. HOLE SIZE: +/- 0.003" b. HOLE TO HOLE: +/- 0.005"

c. HOLE TO EDGE: +/- 0.010" e. HOLE TO FOLD: +/- 0.015" f. FOLD TO FOLD: +/- 0.020"

File Location: (DDB) (EPDM Vault:)
C:\DDB\Drawing Requests\Customers\DDB Website Drawings\OD Family WEB\DR-00423 {OD-30DX}\

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DDB Unlimited in Part or as a whole without the written permission of DDB Unlimited

