
WEB DRAWING (NOT FOR FABRICATION)


For Fabrication Drawing of this enclosure see DWG #00020

- 1. This is a Website Drawing. DO NOT use for fabrication.
- 2. Website Drawings Created from Approved Drawings of Top Level Assembly.

	28.46	—
(86.36)	••	
		••


REVISIONS			
REV.	DESCRIPTION	DATE	
A	Web Drawing per DR-00425	11/15/2011	
В	Add new components and DWG template to WEB DWG per DR-00925	5/12/2014	

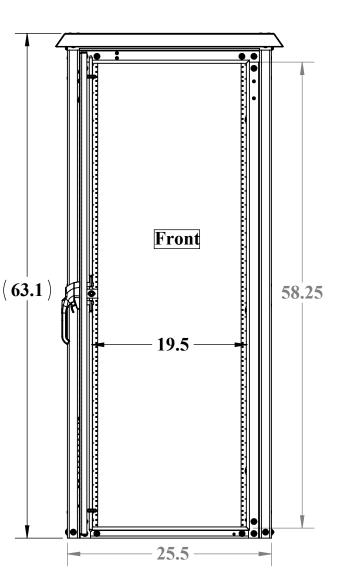


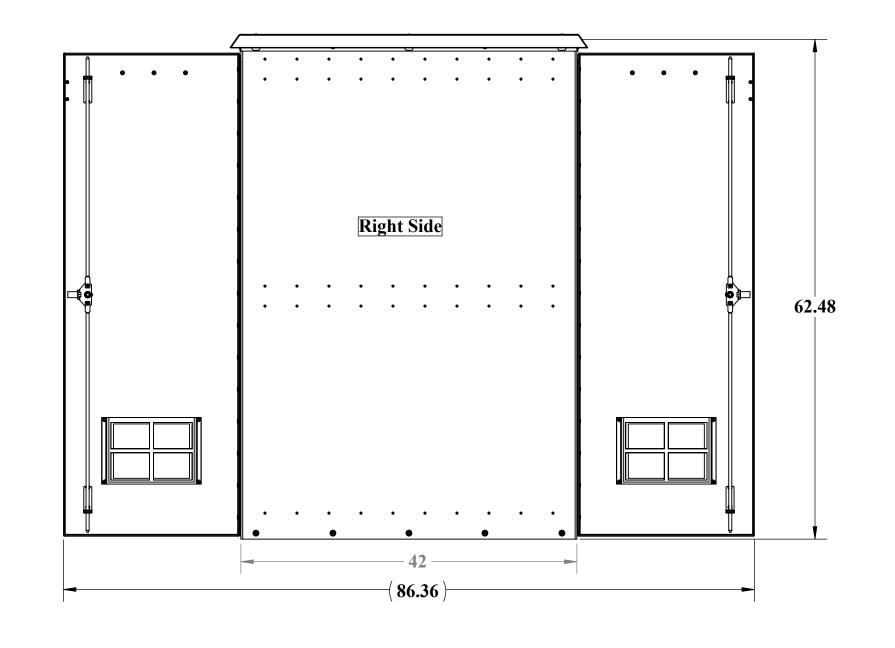

WEB DRAWING (NOT FOR FABRICATION)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DDB UnIDUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DDB Unlimi

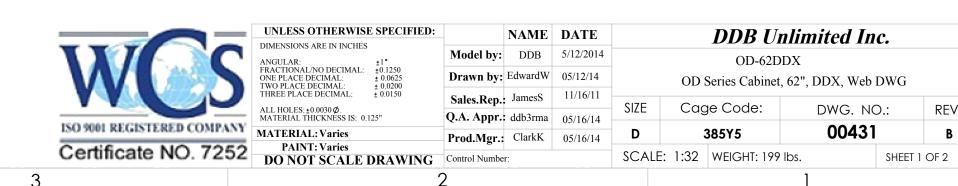

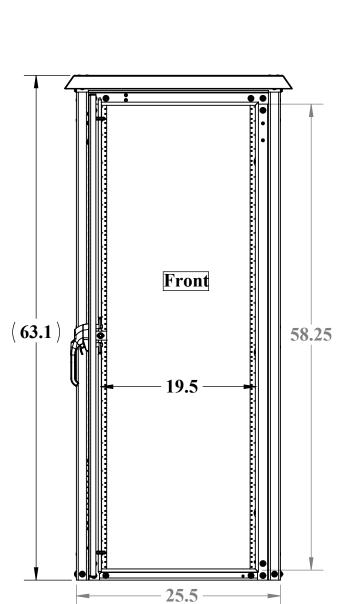

A 16. NO NYLON LOCK NUTS TO BE USED ON ANY PEM STUDS, UNLESS OTHERWISE SPECIFIED. 17. ALL PEM STUDS WILL BE SECURED WITH EXTERNAL TOOTH WASHER AND STANDARD NUTS. 18. TOLERANCES, UNLESS OTHERWISE SPECIFIED: a. HOLE SIZE: +/- 0.003" b. HOLE TO HOLE: +/- 0.005"

c. HOLE TO EDGE: +/- 0.010" e. HOLE TO FOLD: +/- 0.015" f. FOLD TO FOLD: +/- 0.020"

NOTES: UNLESS OTHERWISE SPECIFIED

DOOR LIP - TRIMLOCK 3100B3X1/8C FAN PLATES - STICKER-TITE 1/8x3/8 AC'S - STICKER-TITE 1/4x3/4

10. DO NOT DEBURR PRESS FIT HOLES

MANUFACTURER'S SPECIFICATIONS.

1. DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5M

8. SYMBOL
DENOTES CRITICAL DIMENSIONS AND MUST BE INSPECTED. 9. REMOVE ALL BURRS AND SHARP EDGES 0.025" MAX RADIUS OR CHAMFER

13. ALL OPEN HOLES SHALL BE POPULATED WITH APPLICABLE HARDWARE. 14. IDENTIFY PART WITH PART NUMBER, REVISION LETTER AND SERIAL NUMBER

3. THIS IS A SUPPLEMENTAL DRAWING AND MAY NOT BE FULLY DIMENSIONED. THE NOTES, TOLERANCES, AND SPECIAL INSTRUCTIONS ARE TO BE USED ALONG WITH THE LATEST REVISION OF THE SOLID DATABASE. THE PART OR ASSEMBLY

4. ALL PEM STUDS SHALL BE FHS FOR STAINLESS ENCLOSURES AND FHA FOR ALUMINUM.

7. CUSTOM ENCLOSURES SHALL HAVE SECURITY TORX FOR ALL EXTERIOR HARDWARE.

11. DIMENSIONS SHALL APPLY AFTER ALODINE, PAINT, FINISH, OR COAT IS APPLIED 12. INSTALL PRESS FIT STANDOFFS, STUDS, AND NUTS IN ACCORDANCE WITH THE

15. FINISHED PART TO BE FREE OF OILS, LUBRICANTS, AND OTHER CONTAMINANTS

6. THE FOLLOWING WEATHER STRIPPING SHALL BE USED FOR THE FOLLOWING APPLICATIONS:

2. DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED

IS TO BE CONTROLLED PER THE ELECTRONIC FILE.

5. ALL EXTERIOR WASHERS SHALL BE SEALING WASHERS.

