

Fiber Outdoor Cabinet 62"H X 42"D X 51"W


2OD-62DDX-A1

62"H X 42"D X 51"W (19" or 23" Racking) W/ Splice Chamber, 2 - Slide Out Battery Tray's, 100Amp Load Center, 6000 BTU A/C, Much More

Powder Baked on Cream

Standard 4 Sets of 19" Rails



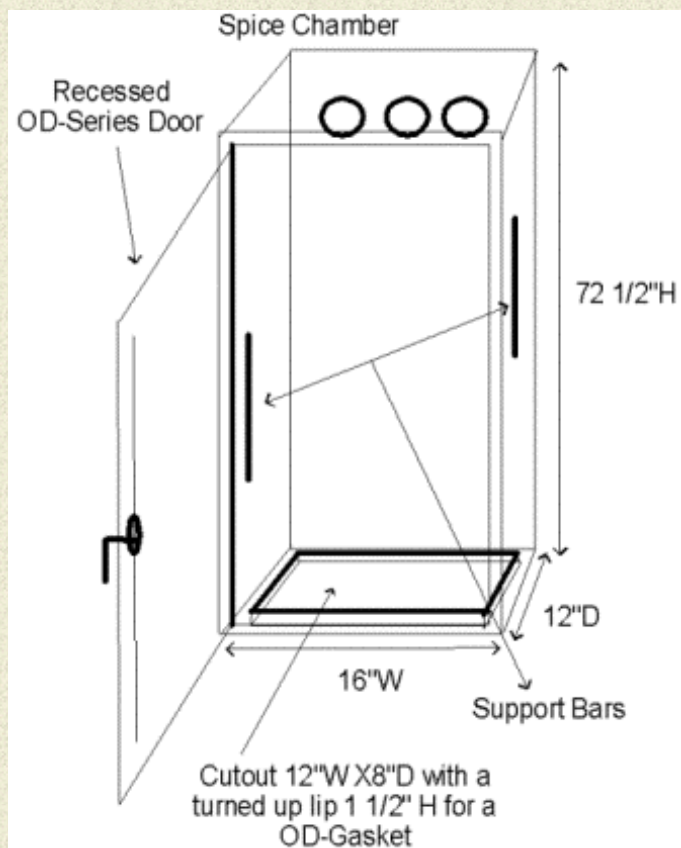

STANDARD FEATURES

ALUMASHIELD: Top cover, shades cabinet from the sun

HANDLES: Stainless Steel NEMA

RAILS: 4 Sets of Fully adjustable & anodyne coated

DOORS: Front and rear secured with three point locks and padlocking handles

(4) - Door Alarm Switch

(4) - Florescent Light 110V

(6) - Heavy Duty Lifting Hook

(1) - 6000 BTU A/C 220V w/ 480 Watts Heat

100 Amp Load Center w/ 4 - Populated 4-Square Outlets

SPECIFICATIONS

GENERAL

Weight: 440 lbs. assembled
500 lbs. Shipping weight

Doors: four - secured by three point locking system
Locks via customer supplied padlocks
sealed with 13/16" aluminum filled gaskets

Material: .125 ALUMIFLEX
Finish: Flat Coated Aluminum
RF properties: Non-ferrous

Vents: Twelve bottom louvers per door
24 - top louvers - In top cover-under ALUMISHIELD
One removable filter panel per door
24 - fixed filter pads in top cover

Handles: Stainless steel

Exterior Screws: Stainless with NEMA washers & nylon locking nuts

RACKING SPECIFICATIONS

Rails: Eight standard (For additional rails see accessories)

Alodine coated

Holes tapped to 10 x 32 threads

Each rail supported by three R-STRUTS

.125 Material (ALUMIFLEX)

Spacing: 19" EIA STANDARD

Positioning: All rails fully adjustable from front to rear

Useable Height: 62 inches

Useable Depth: Maximum: 38 1/2" Minimum 36 3/4" (See below)

	*Section Starting & Ending Points	Vertical Height Per Section	Effective Depth For each section
<u>Top</u>	74.75" - 78.00"	= 3.25"	...38 1/2"
	74.57" - 74.75"	= .18"	...37 1/2"
	45.00" - 74.57"	= 29.57"	...38 1/2"
<u>Center</u>	33.00" - 45.00"	= 12.00"	...36 3/4"
	3.43" - 33.00"	= 29.57"	...38 1/2"
	3.25" - 3.43"	= .18"	...37 1/2"
<u>Bottom</u>	0.00" - 3.25"	= 3.25"	...38 1/2"

***Section measurements start from the bottom of the cabinet (0.00")
& run vertically upward towards the top of the cabinet (62.00"):**

EACH DOOR OPENING CLEARANCE

Width : 19 1/2 inches

Height : 57 13/16 inches

EXTERIOR CABINET DIMENSIONS

Main Body::

Width: 51 inches

Height: 62 1/4 inches

Depth: 42 1/4 inches

ALUMASHIELD:

Width 56.50 inches

Hang down height: 1 3/4 inches

Depth: 44 11/16 inches

Handles: Protrude 1 7/8 inches

Total Space Occupied:

Width: 56.50 inches

Height: 62 1/2 inches

Depth: 46 inches

INSIDE CLEARANCE - LESS RAILS

Width: 23 5/8 inches Each side

Height: 62 inches

Depth: See racking Spec's - useable depth chart above

Battery Compartments

2 Battery Trays Per 20D-62DDX-A1

Each Battery High 16" High, 42" Deep, 25" Wide

*(Each Mounting Tray 2" H X 34"D X 19"W) **Painted Cream***



RATINGS

NEMA: CLASS: 250
TYPE: 4

WARRANTY

PERIOD: SEVEN YEARS - UNCONDITIONAL

ACCESSORIES

R-2-62:	Two extra 62" rails & mtg. hdw.
MTDDX:	Mounting tray
CA-4:	Caster kit (4) & mtg. hdw.
SCR-432:	Rail Screws (4) 10x32

CLIMATE CONTROL OPTIONS

AC-2000I:	2000 BTU A/C 115 Volts Side Mount (with Heater Option)
AC-4000I-2:	4000 BTU A/C 220 Volts Side Mount (with Heater Option)
AC-6000I-2:	6000 BTU A/C 220 Volts Side Mount (with Heater Option)

Powder Baked on Cream

Paint Tested:	500 Hour salt spray 500 hour immersion
----------------------	---

SHIPPING INFORMATION

The 20D-62DDX-A1 is shipped fully assembled