



Outdoor Cabinet 19"H X 24"W X 20"D

PSOD-192420FT

<i>19"H X 24"W X 20"D</i>
<i>19" Racking</i>
<i>110V Fan w/ Thermostat</i>
<i>Insulation &</i>
<i>4 Square 110V Outlet Box</i>
<i>Optional = (HT-100) 100 W Heater</i>

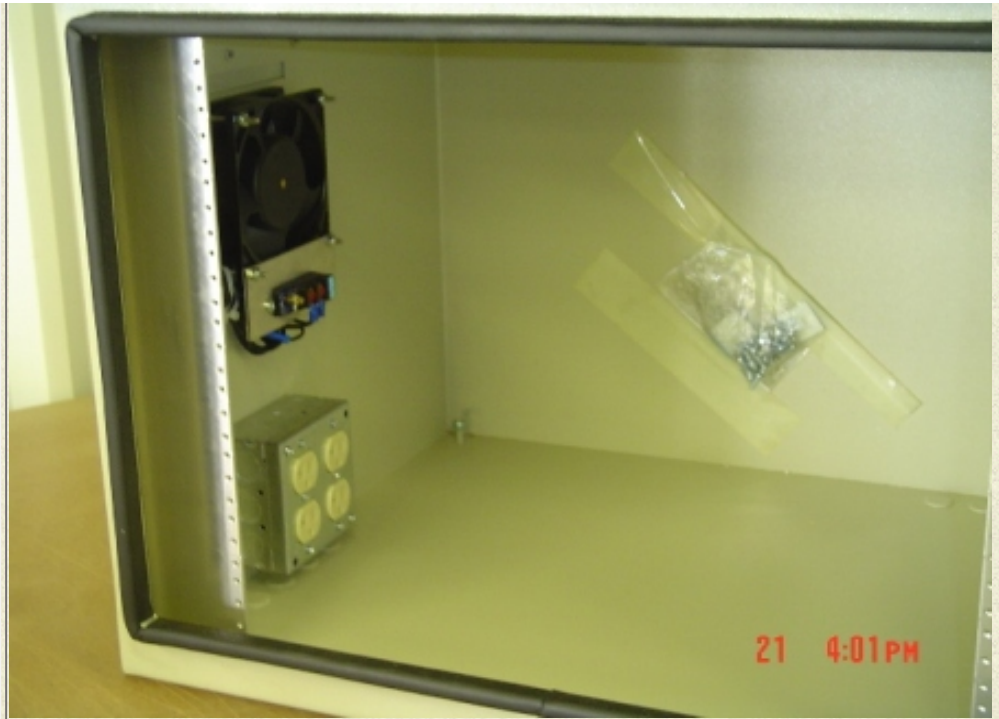

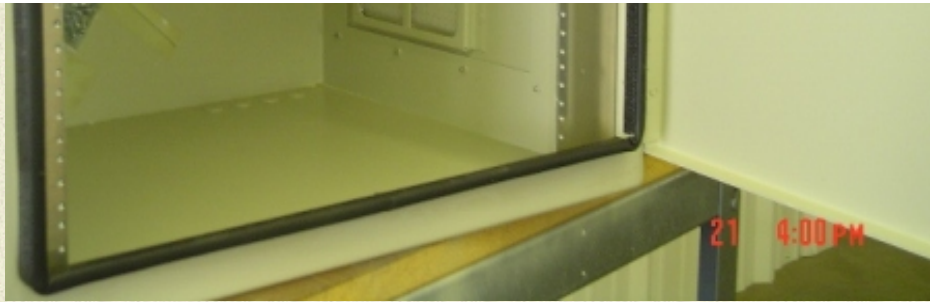

PSOD-192420FT

19" OUTDOOR WIRELESS ENCLOSURE

LIGHTWEIGHT ALUMINUM

17 1/4" X 22" X 18" USABLE SPACE

Physical

Exterior Dimensions 19"H x 24"W x 20"D

Interior Dimensions 17 1/4"H x 22"W x 18"D

Weight 55 Lbs

Construction

Material 0.125" Alumiflex (non-corrosive)

Powder-Coat Paint 3 step tiger drylac

Door

Pad Locking Handle

Gasket filled rubber

Equipment Mounting

EIA Std 19" Racking Rails 9RU (17 1/4") of rack space

Racking Depth 18 1/2"

Environmental Options

Air Cond. (AC-2000) 2000 BTU A/C 110 or 220 Volts AC

Heating (HT-100) 100 watt with tempstat (on 45deg, off 55)

Features Standard

Cooling Fan (F15-115T) 110 cfm Adjustable Thermostat

1/2" Insulation Installed (.5INS)

Electrical 4" sq gangbox with 4 outlets (4SQ)

Four RF knockouts .065" dia. (for type N RF con) on floor of unit

Four Power knockouts 3/4" dia. on floor of unit

Ground stud on floor of unit

Louvered 7.5 " x 10" 5 micron nylon filter / Removable Side Panel

2 = 4" C-Channel in Rear for Mounting with Slots

Warranty 7 years unconditional