



WEB DRAWING (NOT FOR FABRICATION)

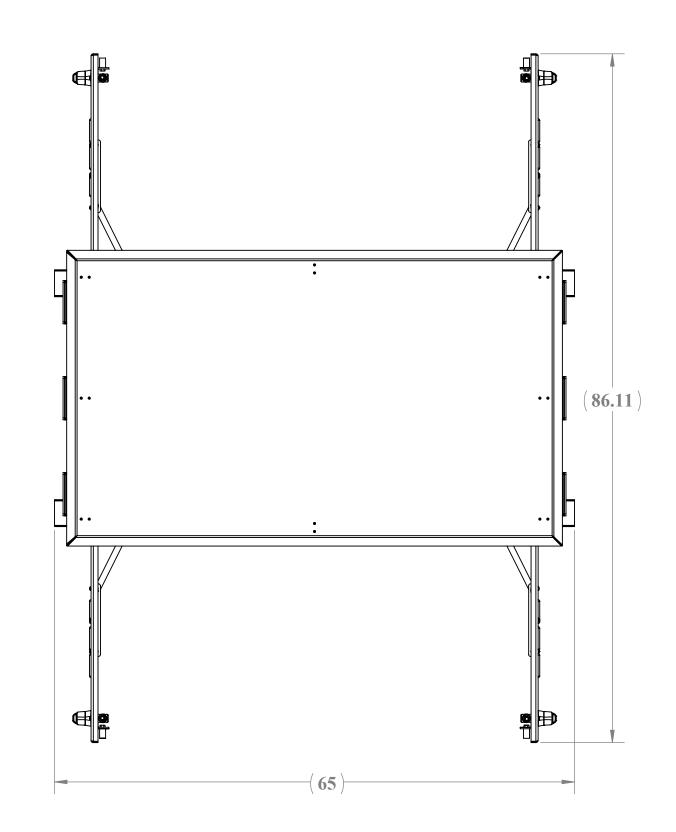

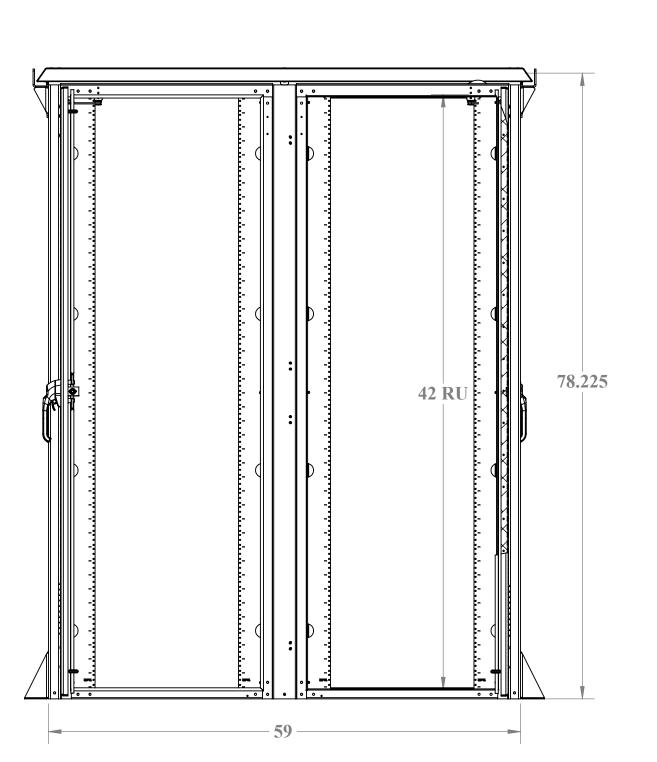

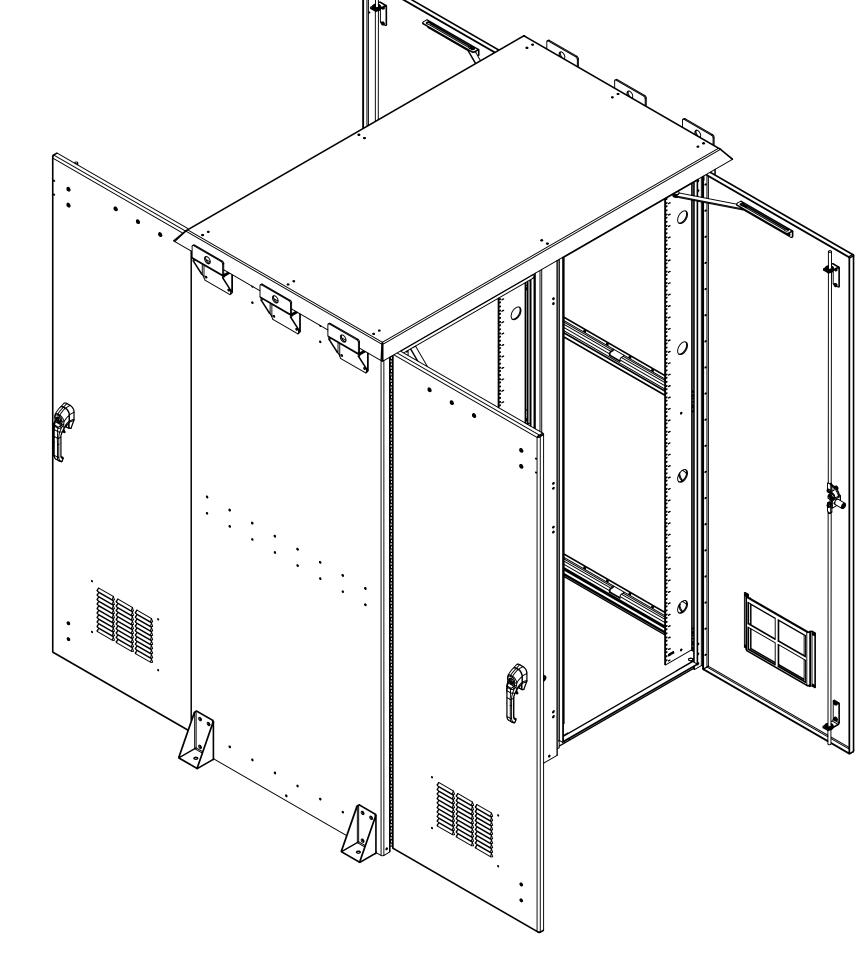

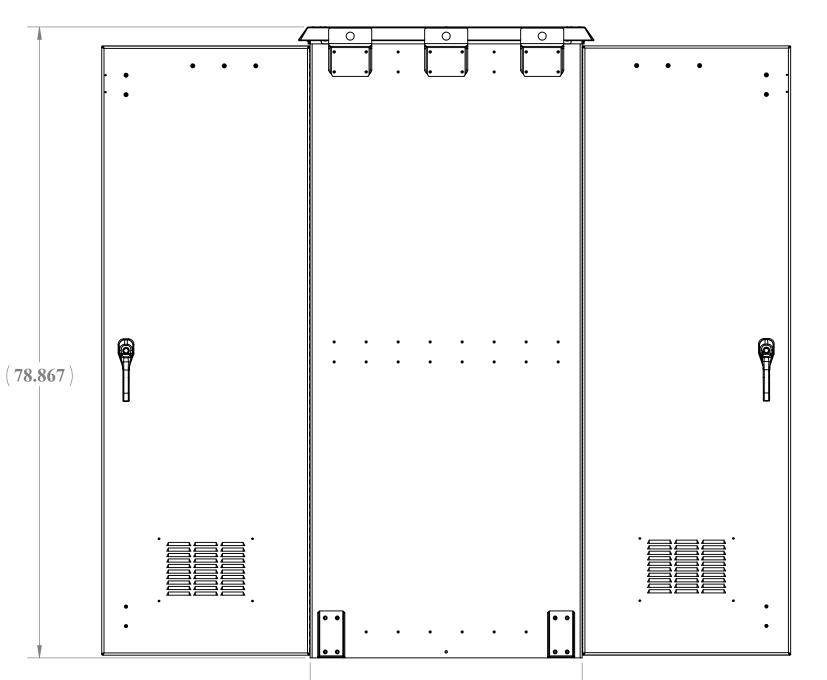

WEB DRAWING (NOT FOR FABRICATION)



UNLESS OTHERWISE	E SPECIFIED:	
DIMENSIONS ARE IN INCHES	Model by:	
ANGULAR:	<u>+</u> 1°	widuci by.
FRACTIONAL/NO DECIMAL:	±0.1250	D 1
ONE PLACE DECIMAL:	± 0.0625	Drawn by:
TWO PLACE DECIMAL: THREE PLACE DECIMAL:	± 0.0200 ± 0.0150	Sales.Rep.
ALL HOLES: ±0.0030 Ø. MATERIAL THICKNESS IS: 0.125"  MATERIAL: Varies		Q.A. Appr.
		Prod.Mgr.:
PAINT: Varies		1 Tournight
DO NOT SCALE I	Control Number	

SPECIFIED:		NAME	D
1° 0.1250 0.0625 0.0200 0.0150	Model by:	DDB	6
	Drawn by:	EdwardW	00
	Sales.Rep.	•	
	Q.A. Appr.	SteveA	0
	Prod.Mgr.:	ClarkK	0
	Control Numbo	<b></b>	

):	-	NAME	DATE			DDB Un	limited In	c.	
	Model by:	DDB	6/4/2014	2OD-78DD WEB DWG, WEB, 2OD, 78, DD					
	Drawn by:	EdwardW	06/04/14						
	Sales.Rep.:			CIZE	Cage Code:		DWO 110		D.E.
	Q.A. Appr.:	SteveA	06/05/14	SIZE	Ca	ge Code.	DWG. NO	).:	RE'
	Prod.Mgr.:		06/05/14	D 385Y5		00970		Δ	
	Control Numbe	r:		SCALE: 1:8		WEIGHT: 0 lbs		SHEET 1	OF 1

NOTES: UNLESS OTHERWISE SPECIFIED

1. DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5M 2. DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED

3. THIS IS A SUPPLEMENTAL DRAWING AND MAY NOT BE FULLY DIMENSIONED. THE NOTES, TOLERANCES, AND SPECIAL INSTRUCTIONS ARE TO BE USED ALONG WITH THE LATEST REVISION OF THE SOLID DATABASE. THE PART OR ASSEMBLY IS TO BE CONTROLLED PER THE ELECTRONIC FILE. 4. ALL PEM STUDS SHALL BE FHS FOR STAINLESS ENCLOSURES AND FHA FOR ALUMINUM.

5. ALL EXTERIOR WASHERS SHALL BE SEALING WASHERS.6. THE FOLLOWING WEATHER STRIPPING SHALL BE USED FOR THE FOLLOWING APPLICATIONS: DOOR LIP - TRIMLOCK 3100B3X1/8C FAN PLATES - STICKER-TITE 1/8x3/8 AC'S - STICKER-TITE 1/4x3/4

7. CUSTOM ENCLOSURES SHALL HAVE SECURITY TORX FOR ALL EXTERIOR HARDWARE. 8. SYMBOL DENOTES CRITICAL DIMENSIONS AND MUST BE INSPECTED.
9. REMOVE ALL BURRS AND SHARP EDGES 0.025" MAX RADIUS OR CHAMFER 10. DO NOT DEBURR PRESS FIT HOLES

11. DIMENSIONS SHALL APPLY AFTER ALODINE, PAINT, FINISH, OR COAT IS APPLIED 12. INSTALL PRESS FIT STANDOFFS, STUDS, AND NUTS IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS. 13. ALL OPEN HOLES SHALL BE POPULATED WITH APPLICABLE HARDWARE.
14. IDENTIFY PART WITH PART NUMBER, REVISION LETTER AND SERIAL NUMBER
15. FINISHED PART TO BE FREE OF OILS, LUBRICANTS, AND OTHER CONTAMINANTS

A 16. NO NYLON LOCK NUTS TO BE USED ON ANY PEM STUDS, UNLESS OTHERWISE SPECIFIED.
17. ALL PEM STUDS WILL BE SECURED WITH EXTERNAL TOOTH WASHER AND STANDARD NUTS. 18. TOLERANCES, UNLESS OTHERWISE SPECIFIED:

a. HOLE SIZE: +/- 0.003" b. HOLE TO HOLE: +/- 0.005" c. HOLE TO EDGE: +/- 0.010" e. HOLE TO FOLD: +/- 0.015" f. FOLD TO FOLD: +/- 0.020"

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DDB Unlim