



	REVISIONS	
REV.	DESCRIPTION	DATE
A	Initial Release per DR-00969	5/28/2014

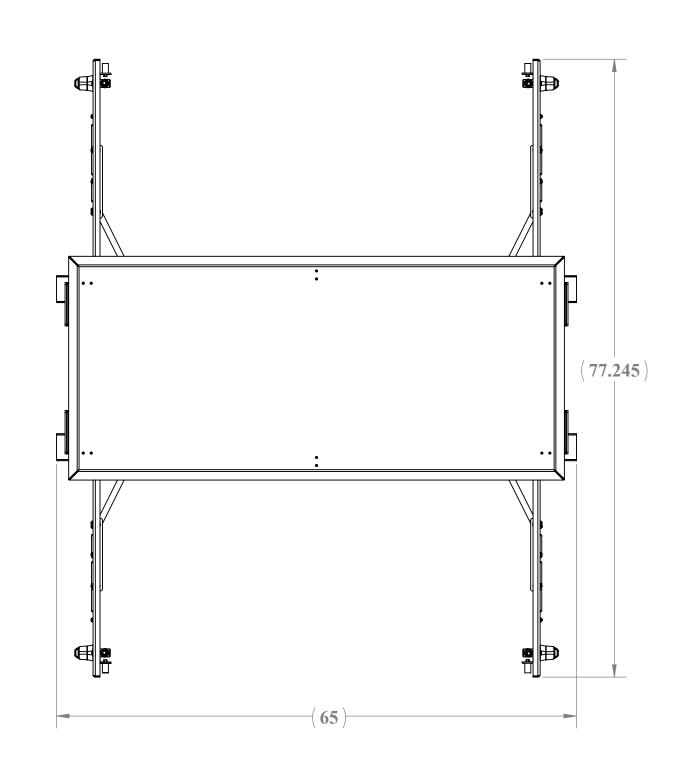

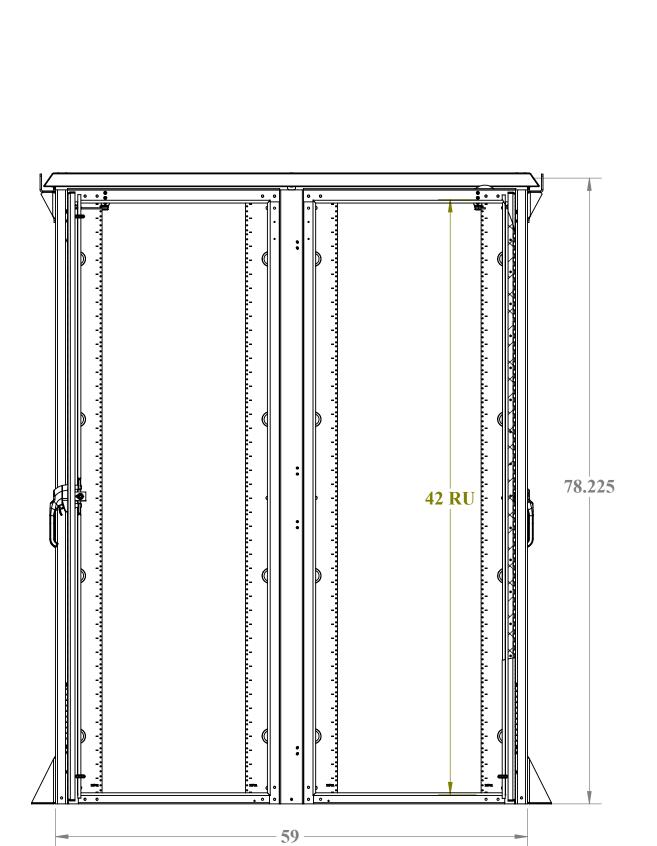

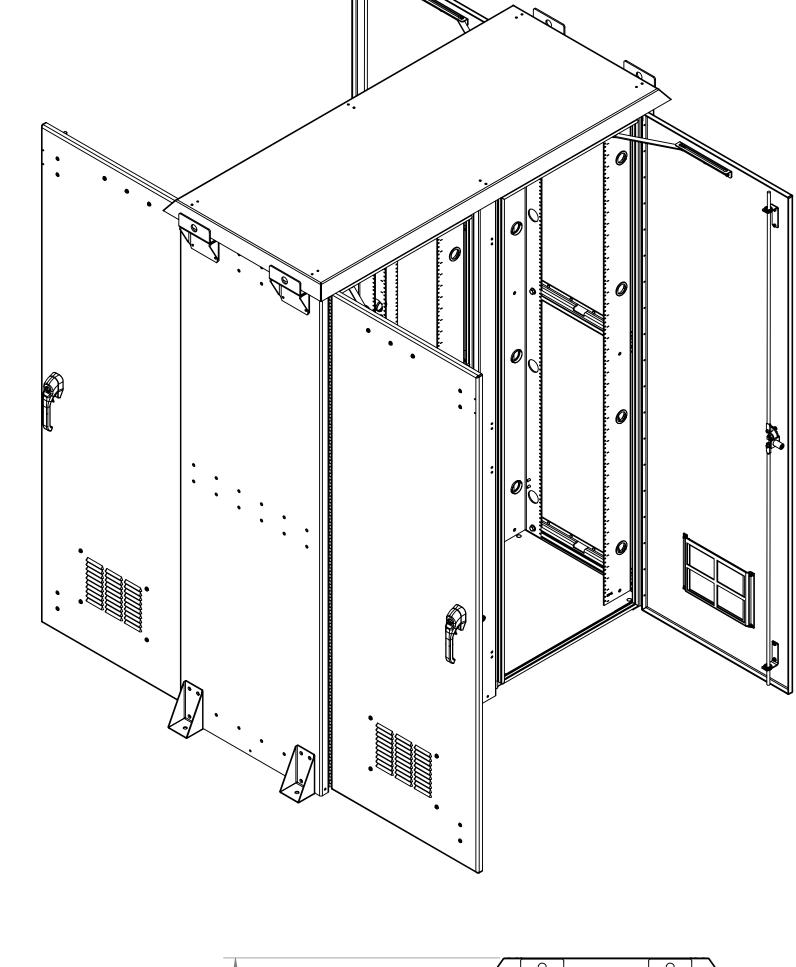

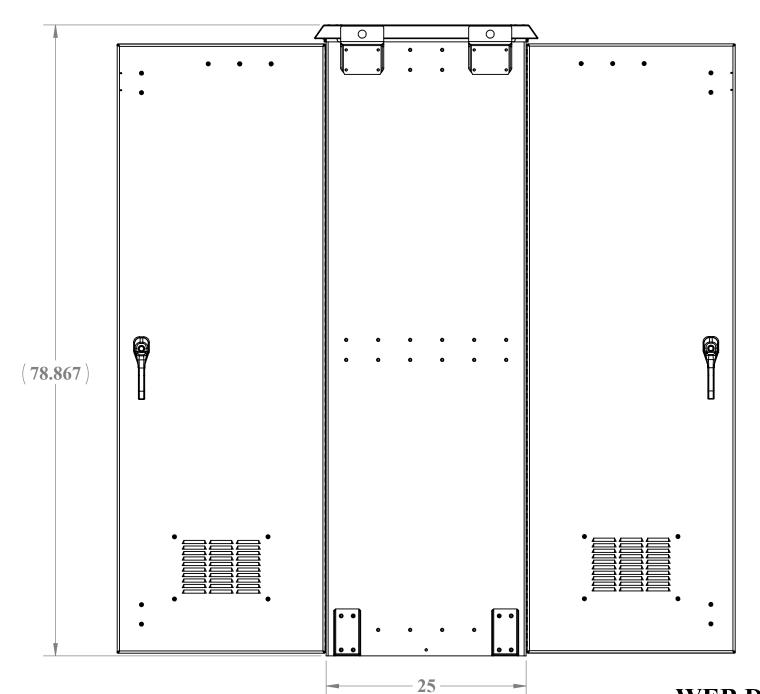

WEB DRAWING (NOT FOR FABRICATION)



	UNLESS OTHERWISH	E SPECIFIE
	DIMENSIONS ARE IN INCHES	
	ANGULAR:	<u>±</u> 1°
	FRACTIONAL/NO DECIMAL:	±0.1250
	ONE PLACE DECIMAL:	± 0.0625
-	TWO PLACE DECIMAL:	± 0.0200
"	THREE PLACE DECIMAL:	± 0.0150
	ALL HOLES: ±0.0030 Ø.	
	MATERIAL THICKNESS IS: 0.1	25"
NY	MATERIAL: Varies	
52	PAINT: Varies	
عد	DO NOT SCALE I	DRAWIN

OTHERWISE SPECIFIED:		
S ARE IN INCHES	Model by:	
±1° L/NO DECIMAL: ±0.1250 DECIMAL: ±0.0625	Drawn by:	
DECIMAL: ± 0.0200 E DECIMAL: ± 0.0150	Sales.Rep.:	
±0.0030 Ø. 'HICKNESS IS: 0.125"	Q.A. Appr.:	
L: Varies	Prod.Mgr.:	
T: Varies	Control Number	

TED:		NAME	DATE			DDB U	nlimited In	l C.
	Model by:	DDB	6/4/2014	2OD-78DX WEB				
	Drawn by:	EdwardW	06/04/14			EB, 2OD, 78, DX		
	Sales.Rep.			SIZE	Ca	ge Code:	DWC N	$\overline{}$
	Q.A. Appr.:	SteveA	06/05/14	SILL	Cu	ge Code.	DWG. NO	J.
	Prod.Mgr.:		06/05/14	D		385Y5	00969	<b>)</b>
	a 111 1		COVIE	1.0	WEIGHT, 200	lbs	Ι.,	

NOTES: UNLESS OTHERWISE SPECIFIED 1. DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5M 2. DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED

3. THIS IS A SUPPLEMENTAL DRAWING AND MAY NOT BE FULLY DIMENSIONED. THE NOTES, TOLERANCES, AND SPECIAL INSTRUCTIONS ARE TO BE USED ALONG WITH THE LATEST REVISION OF THE SOLID DATABASE. THE PART OR ASSEMBLY IS TO BE CONTROLLED PER THE ELECTRONIC FILE.

4. ALL PEM STUDS SHALL BE FHS FOR STAINLESS ENCLOSURES AND FHA FOR ALUMINUM. 5. ALL EXTERIOR WASHERS SHALL BE SEALING WASHERS.6. THE FOLLOWING WEATHER STRIPPING SHALL BE USED FOR THE FOLLOWING APPLICATIONS: DOOR LIP - TRIMLOCK 3100B3X1/8C FAN PLATES - STICKER-TITE 1/8x3/8 AC'S - STICKER-TITE 1/4x3/4

7. CUSTOM ENCLOSURES SHALL HAVE SECURITY TORX FOR ALL EXTERIOR HARDWARE. 8. SYMBOL DENOTES CRITICAL DIMENSIONS AND MUST BE INSPECTED.
9. REMOVE ALL BURRS AND SHARP EDGES 0.025" MAX RADIUS OR CHAMFER

10. DO NOT DEBURR PRESS FIT HOLES 11. DIMENSIONS SHALL APPLY AFTER ALODINE, PAINT, FINISH, OR COAT IS APPLIED 12. INSTALL PRESS FIT STANDOFFS, STUDS, AND NUTS IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS.

13. ALL OPEN HOLES SHALL BE POPULATED WITH APPLICABLE HARDWARE.
14. IDENTIFY PART WITH PART NUMBER, REVISION LETTER AND SERIAL NUMBER
15. FINISHED PART TO BE FREE OF OILS, LUBRICANTS, AND OTHER CONTAMINANTS A

16. NO NYLON LOCK NUTS TO BE USED ON ANY PEM STUDS, UNLESS OTHERWISE SPECIFIED.

17. ALL PEM STUDS WILL BE SECURED WITH EXTERNAL TOOTH WASHER AND STANDARD NUTS. 18. TOLERANCES, UNLESS OTHERWISE SPECIFIED:

a. HOLE SIZE: +/- 0.003" b. HOLE TO HOLE: +/- 0.005" c. HOLE TO EDGE: +/- 0.010" e. HOLE TO FOLD: +/- 0.015" f. FOLD TO FOLD: +/- 0.020"

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DDB Unlimeduction in Part or as a whole without the written permission of ddb unlimenter or as a whole without the written permission of ddb unlimenter or as a whole without the written permission of ddb unlimenter or as a whole without the written permission of ddb unlimenter or as a whole without the written permission of ddb unlimenter or as a whole without the written permission of ddb unlimenter or as a whole without the written permission of ddb unlimenter or as a whole without the written permission of ddb unlimenter or as a whole without the written permission of ddb unlimenter or as a whole without the written permission of ddb unlimenter or as a whole without the written permission of ddb unlimenter or as a whole without the written permission of ddb unlimenter or as a whole without the written permission of ddb unlimenter or as a whole without the written permission of ddb unlimenter or as a whole without the written permission of ddb unlimenter or as a whole without the written permission of ddb unlimenter or as a whole without the written permission of ddb unlimenter or as a whole with the written permission of ddb unlimenter or as a whole with the written permission of ddb unlimenter or as a whole with the written or as a whole with th