


WEB DRAWING (NOT FOR FABRICATION)


For Fabrication Drawing of this enclosure see DWG #: 00042

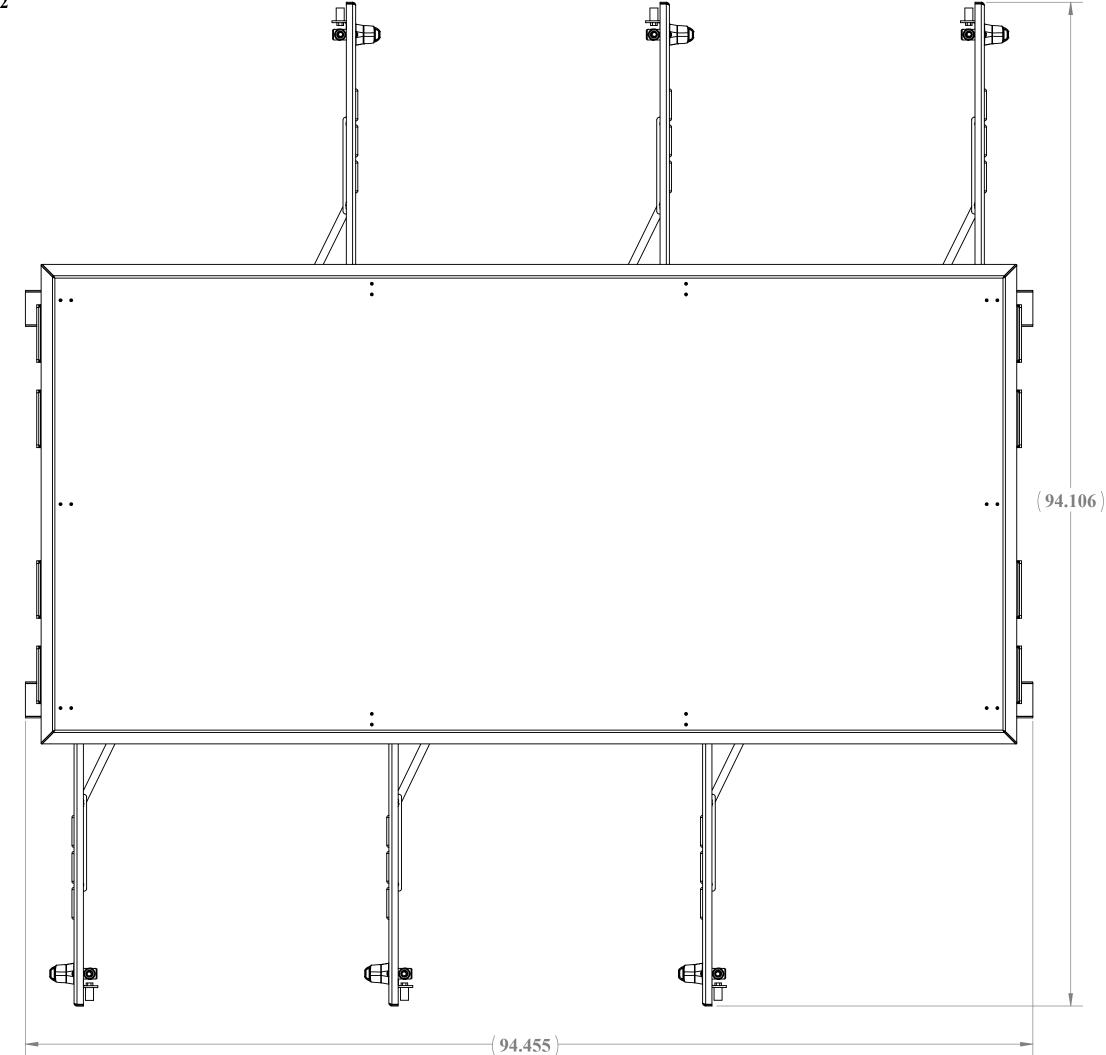

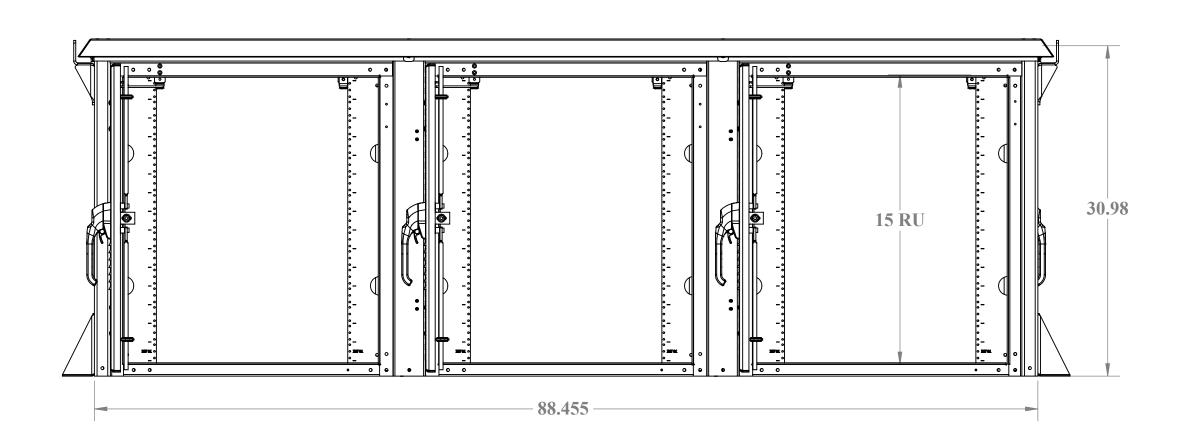

REVISIONS DESCRIPTION **DATE** Initial Release per DR-00978 5/28/2014

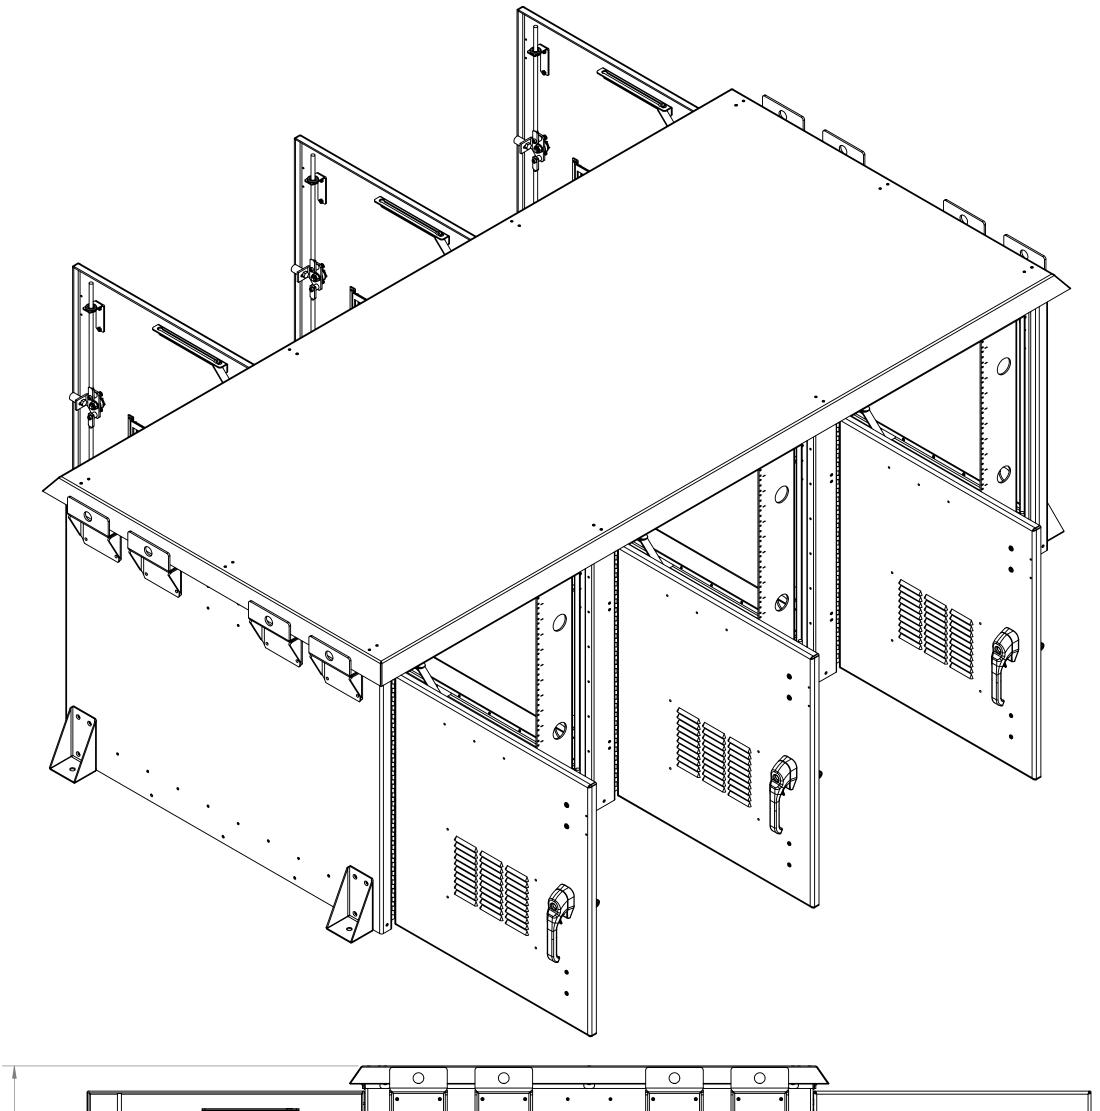

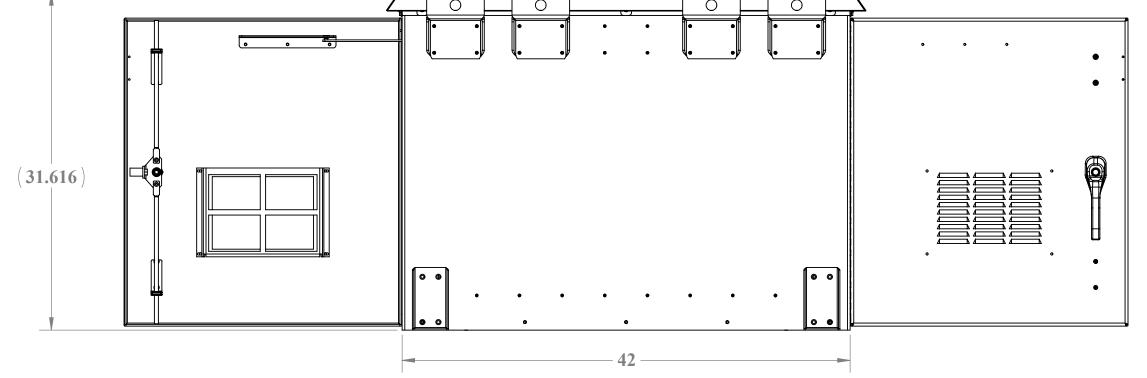

WEB DRAWING (NOT FOR FABRICATION)



	UNLESS OTHERWISE SPECIFIED:		N	
	DIMENSIONS ARE IN INCHES ANGULAR: ±1°	Model by:		
	FRACTIONAL/NO DECIMAL: ±0.1250 ONE PLACE DECIMAL: ±0.0625 TWO PLACE DECIMAL: ±0.0200	Drawn by:	E	
	THREE PLACE DECIMAL: ± 0.0150	Sales.Rep.:		
BANN	ALL HOLES: ±0.0030 Ø. MATERIAL THICKNESS IS: 0.125"	Q.A. Appr.:	d	
PANI	MATERIAL: Varies	Prod.Mgr.:	(
252	PAINT: Varies DO NOT SCALE DRAWING	Control Number:		

D:		NAME	DATE			DDB U	nlimited Inc.				
	Model by:	DDB	6/4/2014	3OD-30DDX WEB DWG, WEB, 3OD, 30, DDX							
	Drawn by:	EdwardW	06/13/14								
	Sales.Rep.	:		SIZE	Caa	o Codo:	DWC N	.	ם כי		
	Q.A. Appr.	ddb3rma	06/17/14	SIZE	Cage Code:		DWG. NO.:		REV		
	Prod.Mgr.:	ClarkK	06/23/14	D	3	385Y5	00978		Α		
G	Control Numbe	r:		SCALE: 1:8		WEIGHT: 398 lbs.		SHEET 1 OF 1			

2. DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED 3. THIS IS A SUPPLEMENTAL DRAWING AND MAY NOT BE FULLY DIMENSIONED. THE NOTES, TOLERANCES, AND SPECIAL INSTRUCTIONS ARE TO BE USED ALONG WITH THE LATEST REVISION OF THE SOLID DATABASE. THE PART OR ASSEMBLY IS TO BE CONTROLLED PER THE ELECTRONIC FILE. 4. ALL PEM STUDS SHALL BE FHS FOR STAINLESS ENCLOSURES AND FHA FOR ALUMINUM.

1. DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5M

4. ALL FEM 510D5 SHALL BE FIIS FOR STAINLESS ENCLOSURES AND FHA FOR ALUMINUM.
5. ALL EXTERIOR WASHERS SHALL BE SEALING WASHERS.
6. THE FOLLOWING WEATHER STRIPPING SHALL BE USED FOR THE FOLLOWING APPLICATIONS: DOOR LIP - TRIMLOCK 3100B3X1/8C FAN PLATES - STICKER-TITE 1/8x3/8 AC'S - STICKER-TITE 1/4x3/4

7. CUSTOM ENCLOSURES SHALL HAVE SECURITY TORX FOR ALL EXTERIOR HARDWARE. 8. SYMBOL DENOTES CRITICAL DIMENSIONS AND MUST BE INSPECTED.
9. REMOVE ALL BURRS AND SHARP EDGES 0.025" MAX RADIUS OR CHAMFER 10. DO NOT DEBURR PRESS FIT HOLES

11. DIMENSIONS SHALL APPLY AFTER ALODINE, PAINT, FINISH, OR COAT IS APPLIED 12. INSTALL PRESS FIT STANDOFFS, STUDS, AND NUTS IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS. 13. ALL OPEN HOLES SHALL BE POPULATED WITH APPLICABLE HARDWARE.
14. IDENTIFY PART WITH PART NUMBER, REVISION LETTER AND SERIAL NUMBER
15. FINISHED PART TO BE FREE OF OILS, LUBRICANTS, AND OTHER CONTAMINANTS

A

16. NO NYLON LOCK NUTS TO BE USED ON ANY PEM STUDS, UNLESS OTHERWISE SPECIFIED.

17. ALL PEM STUDS WILL BE SECURED WITH EXTERNAL TOOTH WASHER AND STANDARD NUTS. 18. TOLERANCES, UNLESS OTHERWISE SPECIFIED:

a. HOLE SIZE: +/- 0.003" b. HOLE TO HOLE: +/- 0.005" c. HOLE TO EDGE: +/- 0.010" e. HOLE TO FOLD: +/- 0.015" f. FOLD TO FOLD: +/- 0.020"

NOTES: UNLESS OTHERWISE SPECIFIED