


REVISIONS DESCRIPTION **DATE** Initial Release per DR-00979 5/28/2014

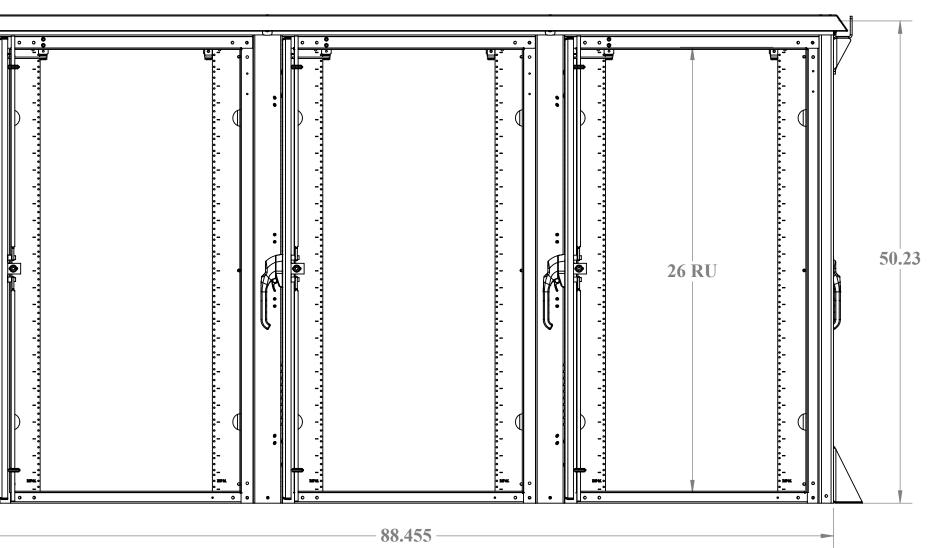

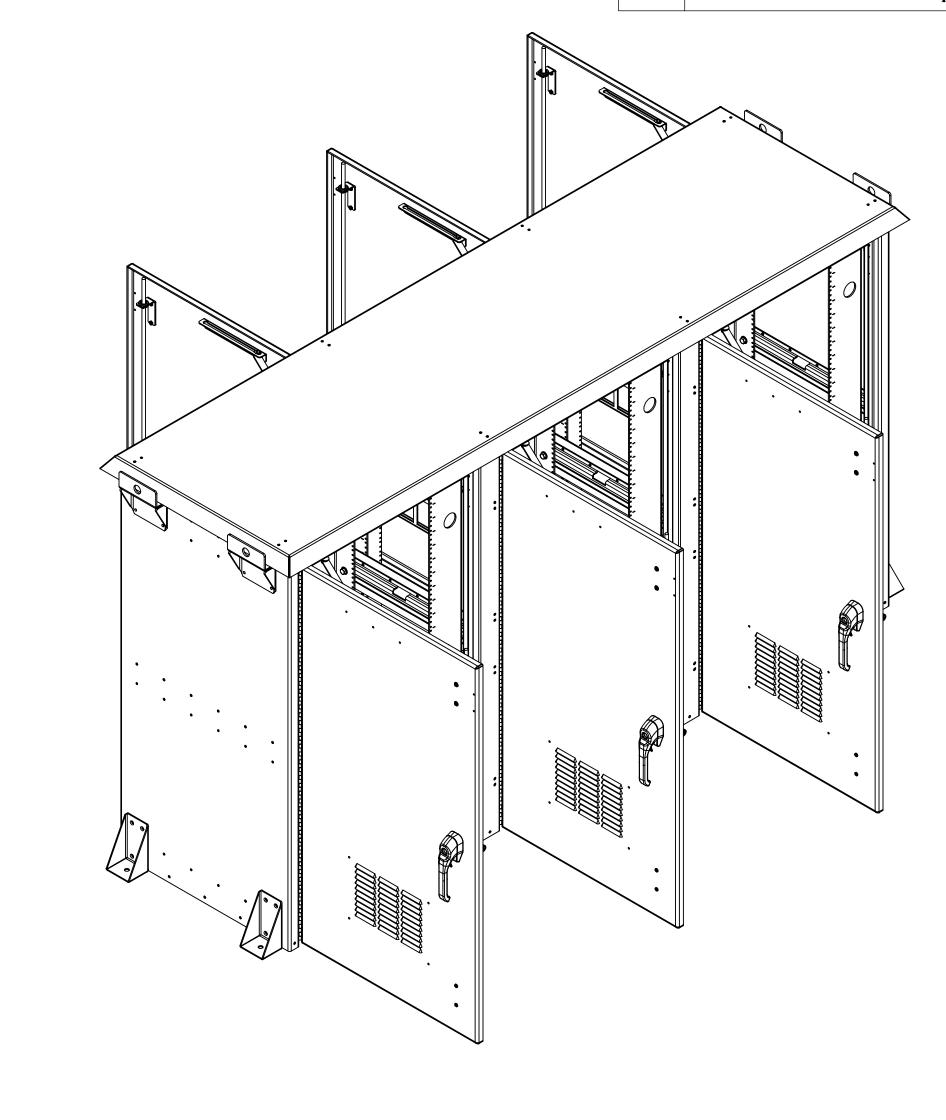

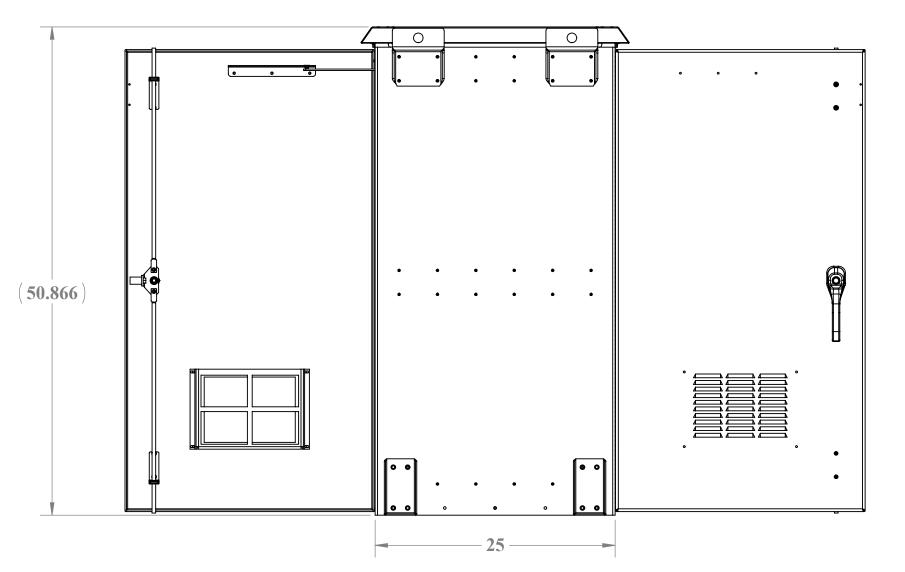


WEB DRAWING (NOT FOR FABRICATION)


Certificate NO. 7252	PAINT: Varies DO NOT SCALE DRAWING	Control Number:			SCALE: 1:8		WEIGHT: 424 lbs.		SHEET 1 (
ISO 9001 REGISTERED COMPANY	ANGULAR: FRACTIONAL/NO DECIMAL: FRACTIONAL/NO DECIMAL: ONE PLACE DECIMAL: TWO PLACE DECIMAL: THREE PLACE DECIMAL: AUDITION THREE PLACE DECIMAL: ALL HOLES: ±0.0030 Ø. MATERIAL THICKNESS IS: 0.125" MATERIAL: Varies	Prod.Mgr.:	ClarkK	06/24/14	D		385Y5 0097 9		7	
		Q.A. Appr.	. Appr.: SteveA	06/24/14	SIZL	Cuţ	ge Code.	DWG. NO.:		
		Sales.Rep.	•		SIZE	Car	ge Code:	DIAIC NO	^	
		Drawn by:	EdwardW	06/13/14	DWG, WEB, 3OD, 50, DX					
		Model by:	DDB	6/4/2014	3OD-50DX WEB					
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES		NAME	DATE		DDB Unlimited Inc.				

For Fabrication Drawing of this enclosure see DWG #: 00042

WEB DRAWING (NOT FOR FABRICATION)

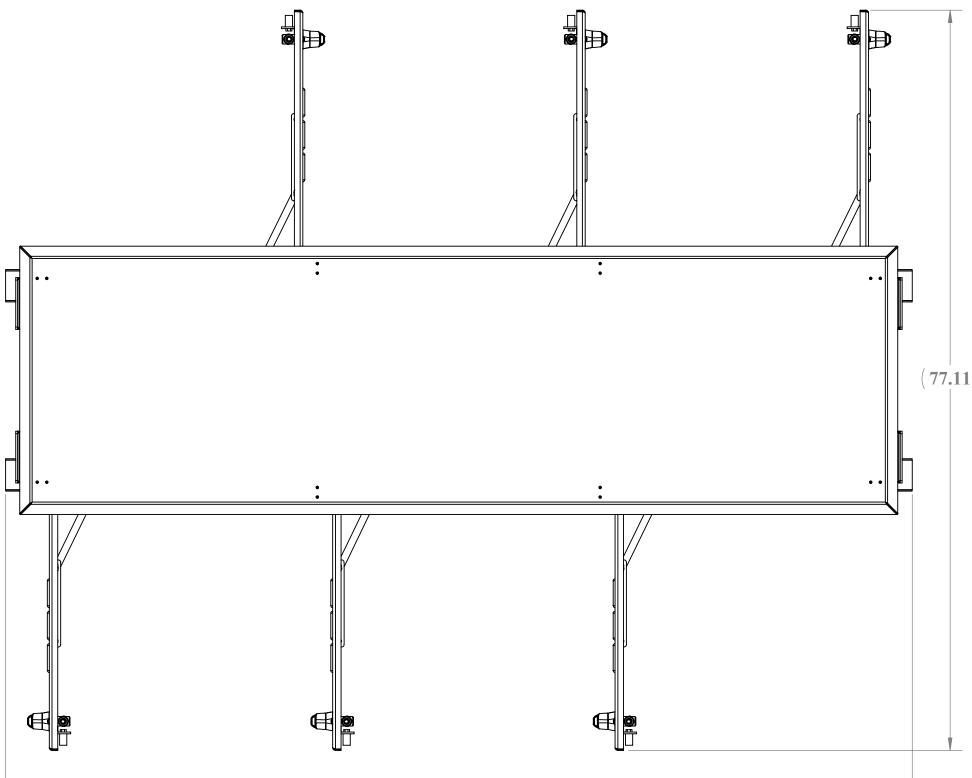

-(94.455)

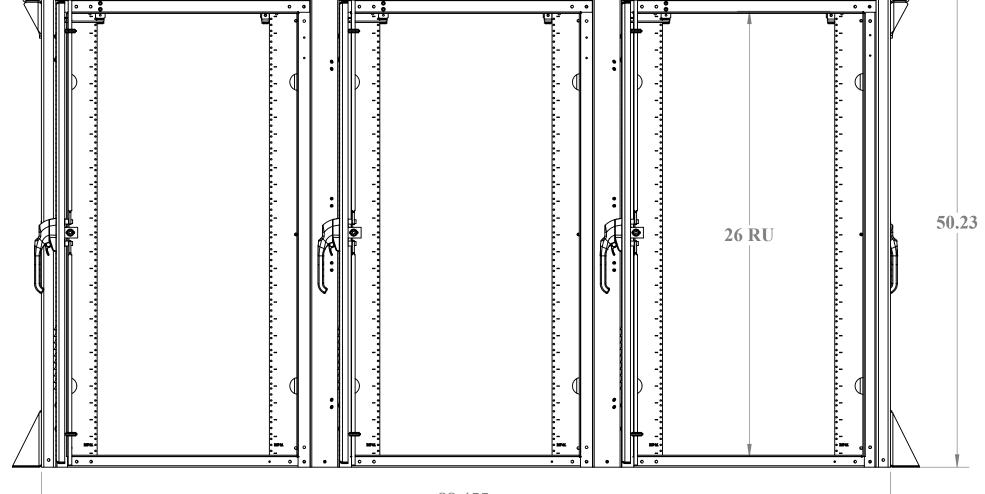

1. DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5M

NOTES: UNLESS OTHERWISE SPECIFIED

2. DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED 3. THIS IS A SUPPLEMENTAL DRAWING AND MAY NOT BE FULLY DIMENSIONED.
THE NOTES, TOLERANCES, AND SPECIAL INSTRUCTIONS ARE TO BE USED ALONG WITH THE LATEST REVISION OF THE SOLID DATABASE. THE PART OR ASSEMBLY IS TO BE CONTROLLED PER THE ELECTRONIC FILE. 4. ALL PEM STUDS SHALL BE FHS FOR STAINLESS ENCLOSURES AND FHA FOR ALUMINUM.

4. ALL FEM STODS SHALL BE FITS FOR STAINLESS ENCLOSURES AND FHA FOR ALUMINUM.
5. ALL EXTERIOR WASHERS SHALL BE SEALING WASHERS.
6. THE FOLLOWING WEATHER STRIPPING SHALL BE USED FOR THE FOLLOWING APPLICATIONS: DOOR LIP - TRIMLOCK 3100B3X1/8C FAN PLATES - STICKER-TITE 1/8x3/8 AC'S - STICKER-TITE 1/4x3/4 7. CUSTOM ENCLOSURES SHALL HAVE SECURITY TORX FOR ALL EXTERIOR HARDWARE.

8. SYMBOL DENOTES CRITICAL DIMENSIONS AND MUST BE INSPECTED.

9. REMOVE ALL BURRS AND SHARP EDGES 0.025" MAX RADIUS OR CHAMFER

10. DO NOT DEBURR PRESS FIT HOLES 11. DIMENSIONS SHALL APPLY AFTER ALODINE, PAINT, FINISH, OR COAT IS APPLIED
12. INSTALL PRESS FIT STANDOFFS, STUDS, AND NUTS IN ACCORDANCE WITH THE
MANUFACTURER'S SPECIFICATIONS.

13. ALL OPEN HOLES SHALL BE POPULATED WITH APPLICABLE HARDWARE.
14. IDENTIFY PART WITH PART NUMBER, REVISION LETTER AND SERIAL NUMBER
15. FINISHED PART TO BE FREE OF OILS, LUBRICANTS, AND OTHER CONTAMINANTS

A 15. FINISHED PART TO BE FREE OF OILS, LUBRICANTS, AND OTHER CONTAMINANTS
16. NO NYLON LOCK NUTS TO BE USED ON ANY PEM STUDS, UNLESS OTHERWISE SPECIFIED.
17. ALL PEM STUDS WILL BE SECURED WITH EXTERNAL TOOTH WASHER AND STANDARD NUTS.
18. TOLERANCES, UNLESS OTHERWISE SPECIFIED:

a. HOLE SIZE: +/- 0.003" b. HOLE TO HOLE: +/- 0.005" c. HOLE TO EDGE: +/- 0.010" e. HOLE TO FOLD: +/- 0.015" f. FOLD TO FOLD: +/- 0.020"

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DDB Unlimited in Part or as a whole without the written permission of DDB Unlimited