
3

REVISIONS DESCRIPTION **DATE** Initial Release per DR-00982 5/28/2014

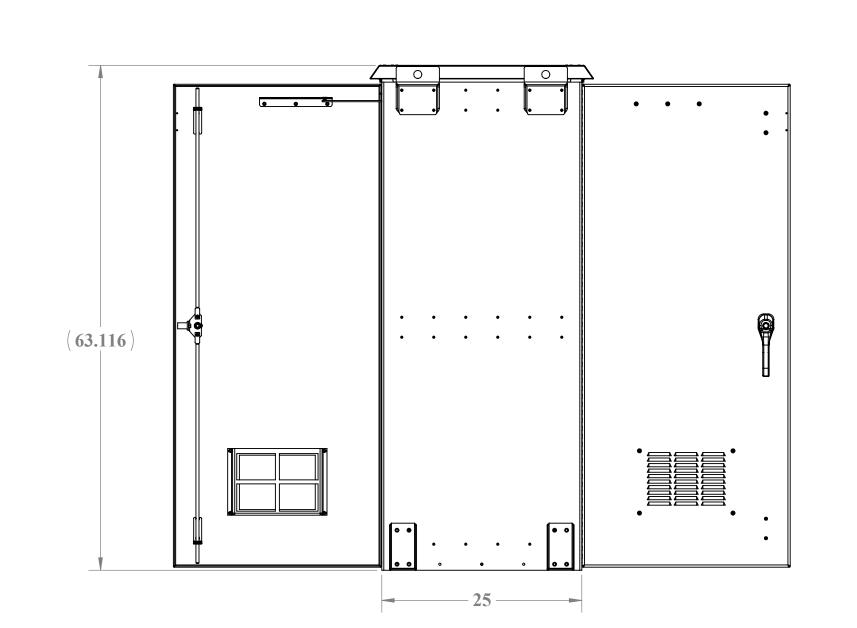


WEB DRAWING (NOT FOR FABRICATION)


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DDB Unlim

ISO 9001 REGISTERED COMPANY	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES		NAME	DATE	DDB Unlimited Inc.				
	ANGULAR: ±1° FRACTIONAL/NO DECIMAL: ±0.1250 ONE PLACE DECIMAL: ±0.0250 TWO PLACE DECIMAL: ±0.0625 TWO PLACE DECIMAL: ±0.0200 THREE PLACE DECIMAL: ±0.0150	Model by:	DDB	6/4/2014	3OD-62DX WEB				
		Drawn by:	EdwardW	06/13/14	DWG, WEB, 30D, 62, DX				
		Sales.Rep.:			SIZE	Car	ge Code:	DWC NO:	
		Q.A. Appr.	SteveA	07/23/14	SIZE	Caç	ge Code.		DWG. NO.:
	MATERIAL: Varies	Prod.Mgr.:	ClarkK	07/23/14	D	385Y5		00982	
Certificate NO. 7252	PAINT: Varies DO NOT SCALE DRAWING	Control Number:			SCALE: 1:8		WEIGHT: 487	lbs.	SHEE

WEB DRAWING (NOT FOR FABRICATION)

For Fabrication Drawing of this enclosure see DWG #: 00042

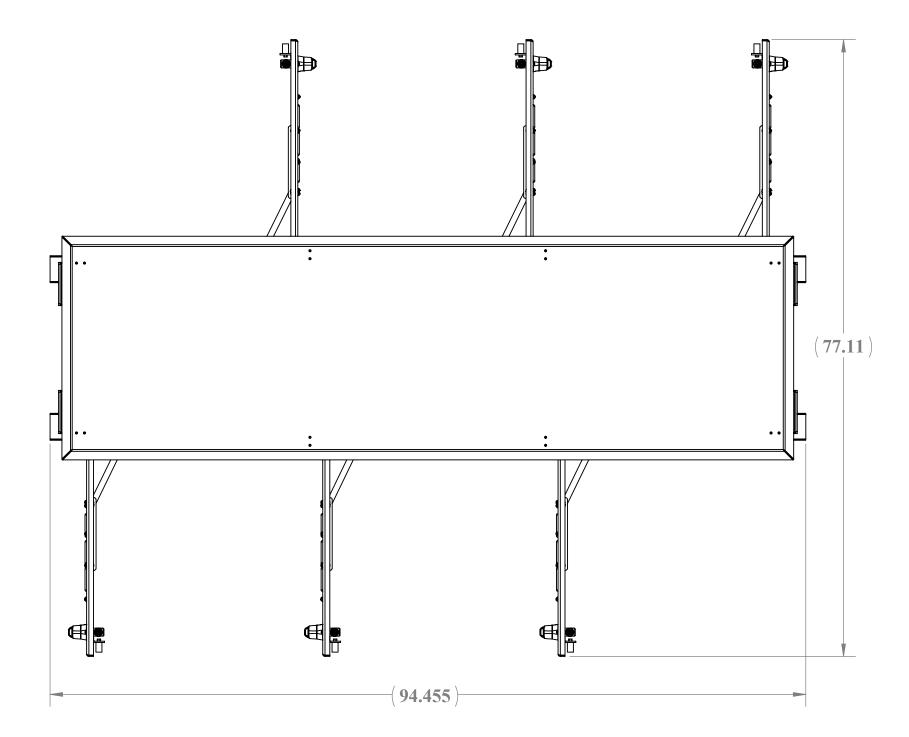

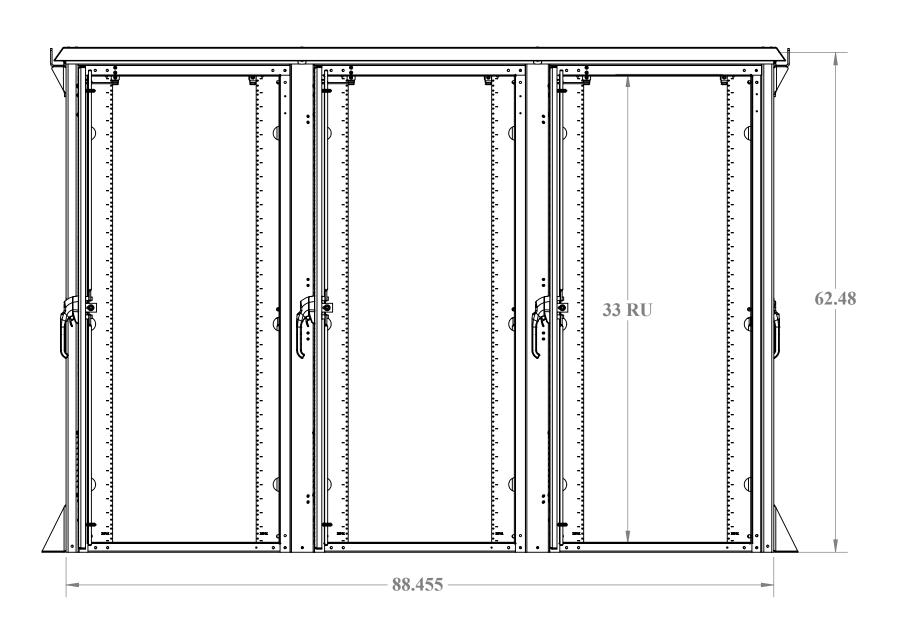

NOTES: UNLESS OTHERWISE SPECIFIED

1. DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5M 2. DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED 3. THIS IS A SUPPLEMENTAL DRAWING AND MAY NOT BE FULLY DIMENSIONED. THE NOTES, TOLERANCES, AND SPECIAL INSTRUCTIONS ARE TO BE USED ALONG WITH THE LATEST REVISION OF THE SOLID DATABASE. THE PART OR ASSEMBLY IS TO BE CONTROLLED PER THE ELECTRONIC FILE.

4. ALL PEM STUDS SHALL BE FHS FOR STAINLESS ENCLOSURES AND FHA FOR ALUMINUM. 5. ALL EXTERIOR WASHERS SHALL BE SEALING WASHERS.
6. THE FOLLOWING WEATHER STRIPPING SHALL BE USED FOR THE FOLLOWING APPLICATIONS: DOOR LIP - TRIMLOCK 3100B3X1/8C FAN PLATES - STICKER-TITE 1/8x3/8 AC'S - STICKER-TITE 1/4x3/4

7. CUSTOM ENCLOSURES SHALL HAVE SECURITY TORX FOR ALL EXTERIOR HARDWARE. 8. SYMBOL DENOTES CRITICAL DIMENSIONS AND MUST BE INSPECTED.
9. REMOVE ALL BURRS AND SHARP EDGES 0.025" MAX RADIUS OR CHAMFER

11. DIMENSIONS SHALL APPLY AFTER ALODINE, PAINT, FINISH, OR COAT IS APPLIED 12. INSTALL PRESS FIT STANDOFFS, STUDS, AND NUTS IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS.

A 16. NO NYLON LOCK NUTS TO BE USED ON ANY PEM STUDS, UNLESS OTHERWISE SPECIFIED.

17. ALL PEM STUDS WILL BE SECURED WITH EXTERNAL TOOTH WASHER AND STANDARD NUTS. 18. TOLERANCES, UNLESS OTHERWISE SPECIFIED:

c. HOLE TO EDGE: +/- 0.010"

e. HOLE TO FOLD: +/- 0.015" f. FOLD TO FOLD: +/- 0.020"

File Location: (DDB) (EPDM Vault:)
C:\DDB\Drawing Requests\Customers\DDB WEB DWG\30D Family WEB\DR-00982 {30D-62DX WEB DWG}\

10. DO NOT DEBURR PRESS FIT HOLES

13. ALL OPEN HOLES SHALL BE POPULATED WITH APPLICABLE HARDWARE.
14. IDENTIFY PART WITH PART NUMBER, REVISION LETTER AND SERIAL NUMBER
15. FINISHED PART TO BE FREE OF OILS, LUBRICANTS, AND OTHER CONTAMINANTS

a. HOLE SIZE: +/- 0.003" b. HOLE TO HOLE: +/- 0.005"