


# OPSOD-192420-AC

## 19" H x 24" W x 20" D (10 RU) Outdoor Enclosure

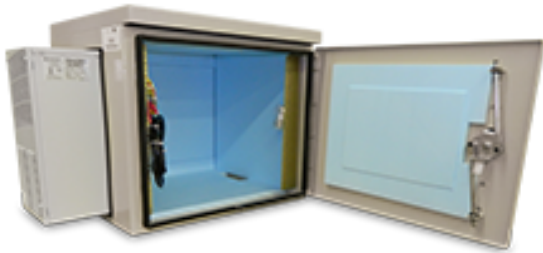

### General

#### Weight

- 95 Lbs. assembled
- 140 Lbs. shipping weight

#### Doors

- Gasket filled rubber

#### Material

- .125" Alumiflex™ (non-corrosive)
- Finish: Painted cream

#### Handles

- Quarter turn padlocking handle

### Racking Specifications

#### Rails

- One set standard (for additional rails see accessories)
- Alodine coated
- Holes tapped for 10-32 threads
- Each rail supported by slotted studs
- .125" Material (Alumiflex™)

#### Spacing

- 19" EIA standard

#### Useable Height

- Height: 19"

#### Useable Depth

- Maximum: 21.5" Minimum: 19.75"

### Comes With

- 800 BTU Air Programmable Conditioner
- 110 Volt
- .5 Insulation
- Populated 4 Square Outlet

### Mounting

#### C-Channel Feet

- Width: 4"
- Height: 2"
- Depth: 3.625"

#### Mounting Slots

- Width: .125"
- Height: 1"

#### Spacing

- 2 inch on center, 3/4" inch from end to center first slot

### Inside Clearance - Less Rails

#### Height

- 18.75"

#### Width

- 23.75"

#### Depth

- 19.75"

### Ratings

#### NEMA Class Types available

- Class 250 Type 4X

#### Paint Tested

- 1000 Hour salt spray (textured)
- 1000 Hour immersion

### Door Opening Clearance

#### Height

- 16"

#### Width

- 21.5"

### Exterior Cabinet Dimensions

#### Main Body

- Height: 19"
- Width: 24"
- Depth: 20"

#### Total Space Occupied

- Height: 20"
- Width: 24"
- Depth: 26.625"