




Indoor and Outdoor Enclosures

Outdoor Nema 3, 3R, 4, 4X Cabinet Enclosures • LTE • 4G • Wimax • Telecom • Security • Traffic

N28 Narrow Indoor/Outdoor Base Models

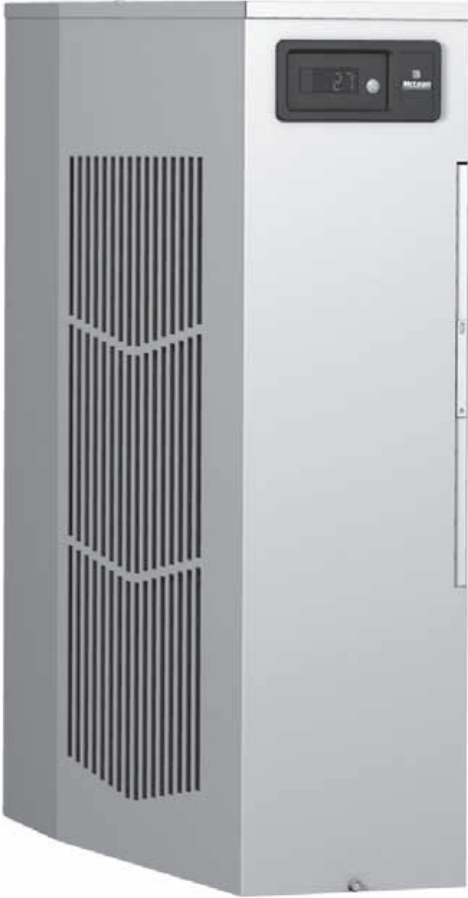

Industry Standards

UL/cUL Listed Type 12, 3R, 4; 4X optional

CE
IP 56 Internal Loop
IP 34 on External Loop
Telcordia GR-487 capable (Outdoor)

Application

- Industrial automation
- Waste water treatment systems
- Package handling equipment
- Security and defense systems

Features

- R407c and R134a earth-friendly refrigerants and RoHS compliant
- Models for 115, 230 AC volt power input
- UL Listed to save customers time and money with agency approvals
- Outdoor model operating temperature range from -40 F/-40 C to 131 F/55 C
- Attractive industrial design with minimal use of visible fasteners
- Reliable mechanical thermostat on enclosure side of the unit.
- Galvanized sheet-metal cover for rugged factory and outdoor environments
- Easy-mount flanges for simple installation
- Cut-out adapter options for enclosures with McLean GENESIS® and T-Series air conditioners, enabling users to easily transition to the new unit
- Dust-resistant condenser coil allows the unit to be run filterless in most applications
- Cleanable, reusable aluminum mesh filter to protect coils for maximum cooling performance
- Mounting hardware, gaskets and user manual furnished with the unit
- Every unit functionally tested before shipping
- Standard Indoor Air Conditioner models also include:
 - Power-off relay for door switch and other system requirements

Specifications

- Nominal cooling capacity 4000 BTUs/Hr. (1172 W)
- Outdoor model operating temperature range from -40 F/-40 C to 131 F/55 C

Finish

- RAL 7035 light-gray, semi-textured powder-coat paint
- Other colors and textures available

Notes

Visit www.McLeanCoolingTech.com to download 2D and 3D CAD drawings into the overall design of your electronic system.

8445 Highway 77 North, Wynnewood, OK 73098
T: (800) 753-8459 • F: (877) 220-7236
sales@ddbunlimited.com • www.ddbunlimited.com

ISO 9001 Certified
CSA Certified
Cage Code 385Y5



Indoor and Outdoor Enclosures

Outdoor Nema 3, 3R, 4, 4X Cabinet Enclosures • LTE • 4G • Wimax • Telecom • Security • Traffic

Performance Data N28 4000 BTU/Hr. (1172 W) Models

CATALOG NUMBER			
Indoor Model	N280416G050	N280426G050	N280425G050
Indoor Model Stainless Steel Type 4X	N280416G051	N280426G051	N280425G051
Outdoor Model without Heat Pkg.	N280416G100	N280426G100	N280425G100
Outdoor Model without Heat Pkg. Stainless Steel Type 4X	N280416G102	N280426G102	N280425G102
Outdoor Model with Heat Pkg.	N280416G150	N280426G150	N280425G150
Outdoor Model with Heat Pkg. Stainless Steel Type 4X	N280416G151	N280426G151	N280425G151
COOLING PERFORMANCE			
Nominal:			
BTUs/Hr.	3800 / 4000	3800 / 4000	3800 / 4000
Watts	1114 / 1172	1114 / 1172	1114 / 1172
At 131 F / 131 F (55 C / 55 C):			
BTUs/Hr (50 / 60 Herz)	3805 / 4162	4394	3818
Watts (50 / 60 Herz)	1115 / 1220	1288	1119
At 95 F / 95 F (35 C / 35 C):			
BTUs/Hr (50 / 60 Herz)	3589 / 3974	3690	3298
Watts (50 / 60 Herz)	1052 / 1165	1081	967
Refrigerant	R134a	R134a	R134a
Refrigerant Charge (ounces/grams)	11 / 312	11 / 312	11 / 312
Operating Temperature Range:			
Maximum (°F / °C)	125/52	125/52	125/52
Minimum (°F / °C)	-40/-40	-40/-40	-40/-40
Air Flow at 0 Static Pressure:			
Internal loop 50 Hz (CFM / M ³ /Hr)	138 / 234	N/A	138 / 234
External loop 50 Hz (CFM / M ³ /Hr)	268 / 455	N/A	268 / 455
Internal loop 60 Hz (CFM / M ³ /Hr)	143 / 362	143 / 243	N/A
External loop 60 Hz (CFM / M ³ /Hr)	288 / 728	288 / 489	N/A
ELECTRICAL DATA			
Rated Voltage	110 / 115	230	230
Frequency (Hertz)	50 / 60	60	50
Operating Range	+/-10%	+/-10%	+/-10%
Max. Power Consumption (Watts at 50 / 60 Hz)	1039 / 1191	1250	1111
Max. Nominal Current (Amps at 50 / 60 Hz)	11.6-11.2	6.5	5.8
Starting Current (Amps)	40	24.5	24.5
Agency Approvals	cUL Listed, CE, Others available upon request		
Power Input Description			
ENCLOSURE PROTECTION			
UL Type	Type 12/3R/4 Standard 4X Stainless Steel Optional		
CONTROLLER			
Description	Basic Mechanical Thermostat		
Thermostat Location	Enclosure Side		
Factory Thermostat Setting (°F / °C)	80 / 27		
SOUND LEVEL			
At 1.5 Meters	66.1 dBA	65.5 dBA	65.5 dBA
UNIT CONSTRUCTION			
Material	Galvanized sheet metal standard Stainless steel optional		
Finish	RAL 7035 light-gray, semi-textured powder-coat paint standard Other colors available		
UNIT DIMENSIONS			
Height (in / mm)	28 / 711.2		
Width (in / mm)	11.50 / 292.1		
Depth (in / mm)	14.00 / 355.6		
Weight (lb / kg)	84/38	84/38	92/41.7

8445 Highway 77 North, Wynnewood, OK 73098

T: (800) 753-8459 • F: (877) 220-7236

sales@ddbunlimited.com • www.ddbunlimited.com



ISO 9001 Certified
CSA Certified
Cage Code 385Y5



Indoor and Outdoor Enclosures

Outdoor Nema 3, 3R, 4, 4X Cabinet Enclosures • LTE • 4G • Wimax • Telecom • Security • Traffic

Performance Curves for N28 Models 4000 BTU/Hr. (1172 Watt)

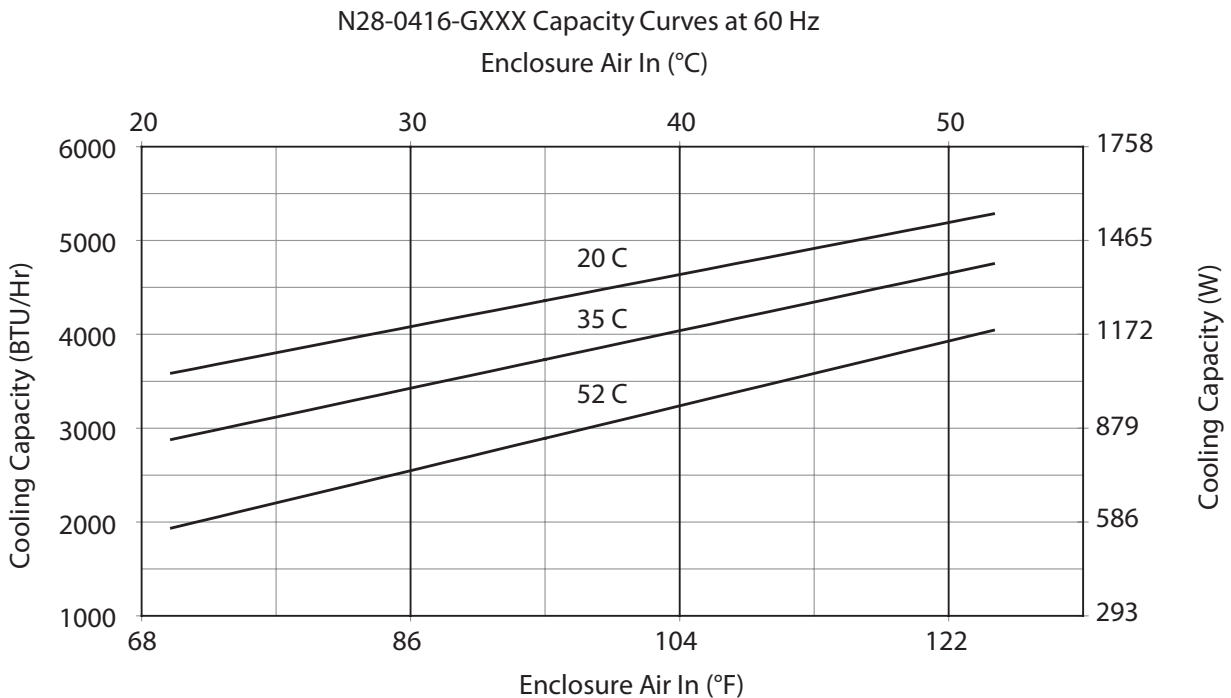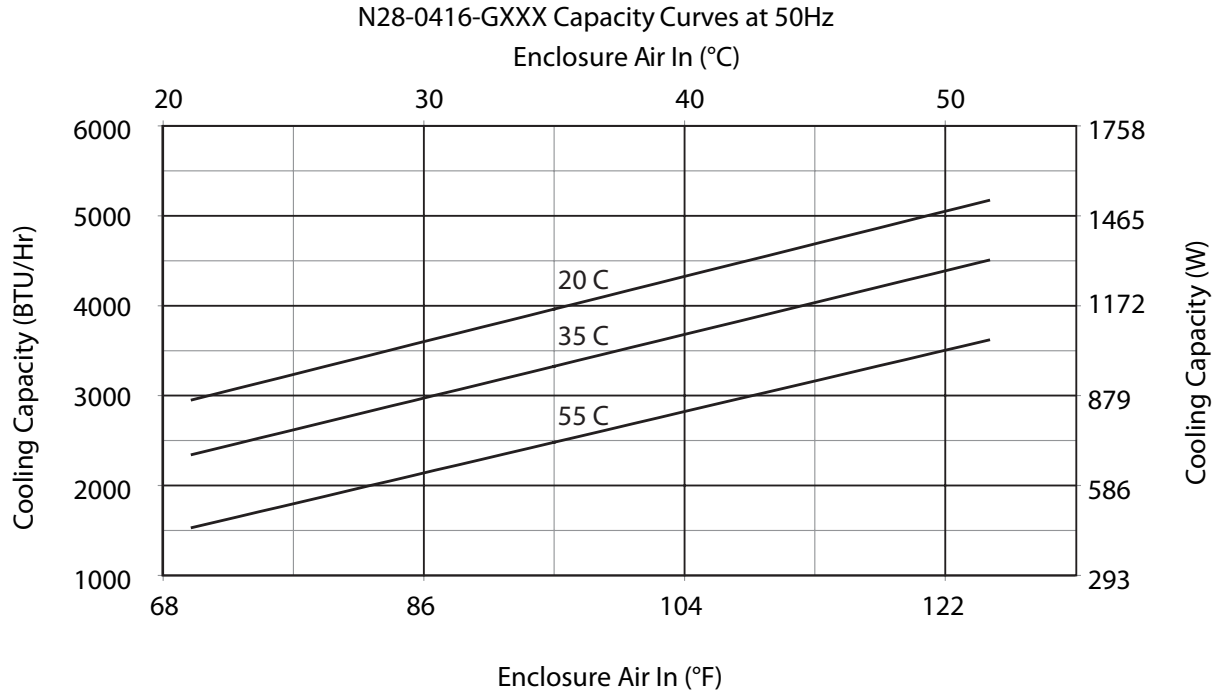

8445 Highway 77 North, Wynnewood, OK 73098
T: (800) 753-8459 • F: (877) 220-7236
sales@ddbunlimited.com • www.ddbunlimited.com



ISO 9001 Certified
CSA Certified
Cage Code 385Y5



Indoor and Outdoor Enclosures

Outdoor Nema 3, 3R, 4, 4X Cabinet Enclosures • LTE • 4G • Wimax • Telecom • Security • Traffic


Performance Curves for N28 Models 4000 BTU/Hr. (1172 Watt)

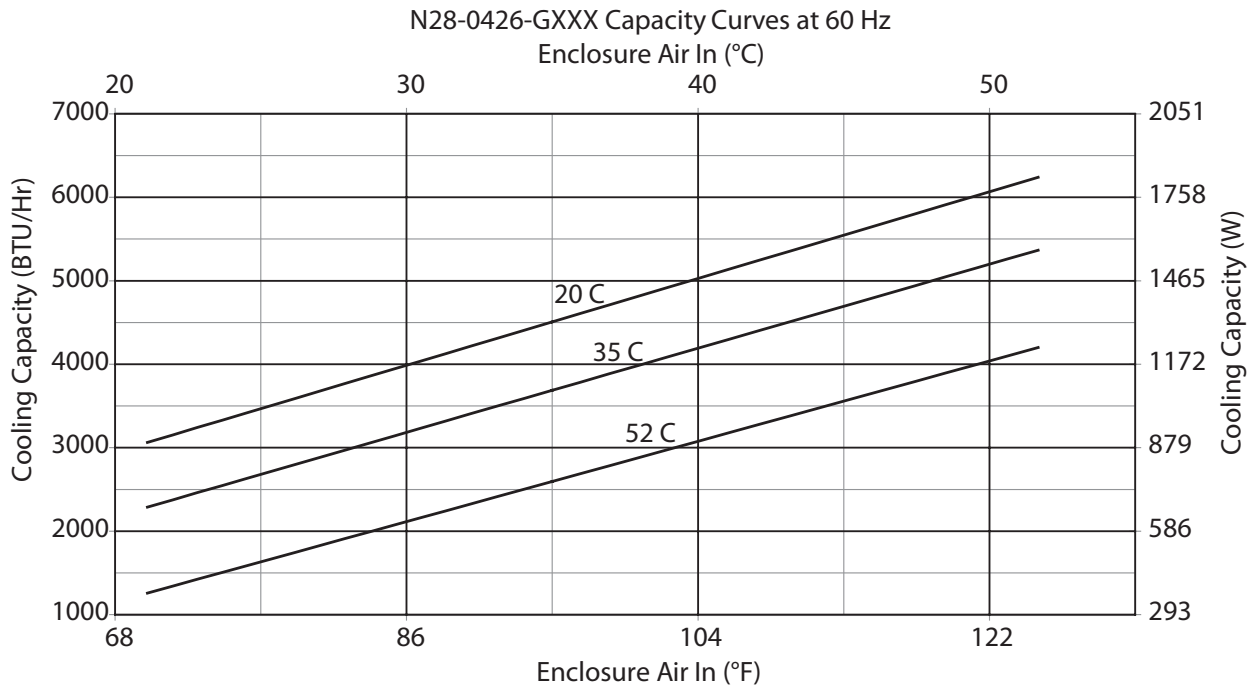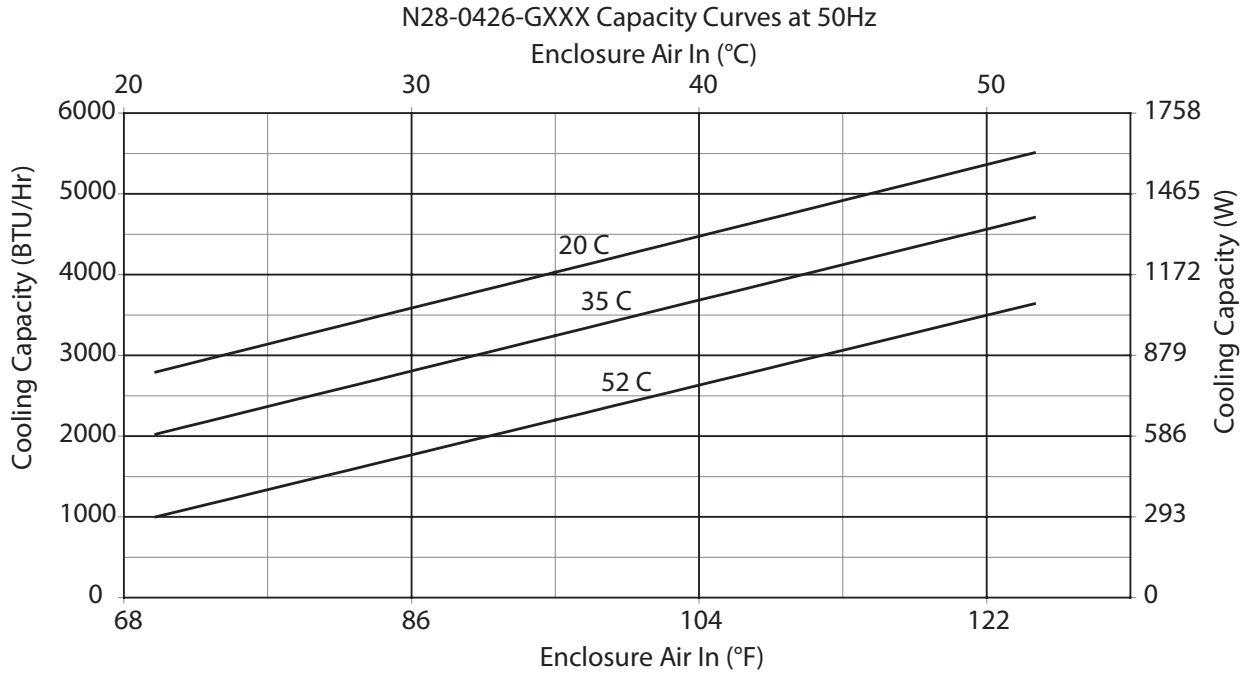

8445 Highway 77 North, Wynnewood, OK 73098
T: (800) 753-8459 • F: (877) 220-7236
sales@ddbunlimited.com • www.ddbunlimited.com

ISO 9001 Certified
CSA Certified
Cage Code 385Y5

N28 Models 4000 BTU/Hr. (1172 Watt)

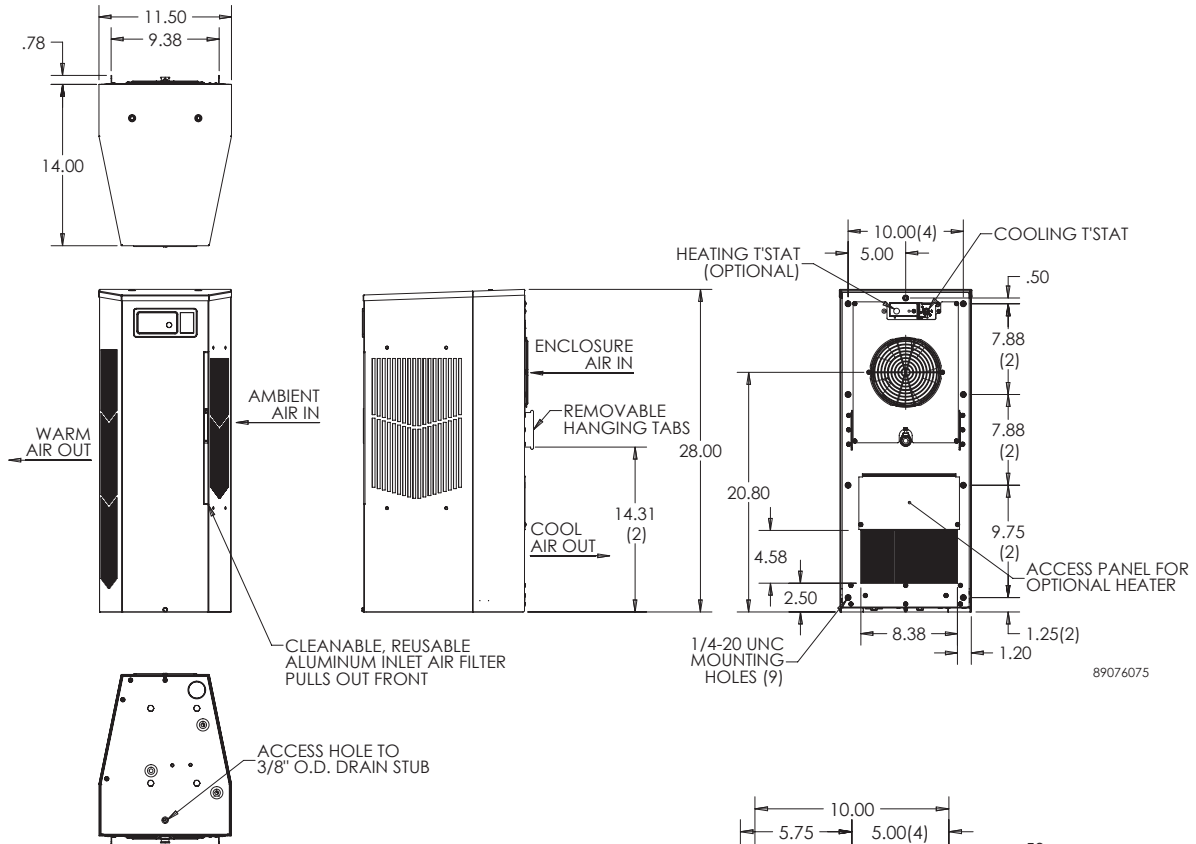

89076075

