

OD-UL Series OD-62DDC-UL50



Why Choose the OD-UL Series?

The OD-UL series of enclosures are the ultimate choice for your outdoor racking requirements. Being made of our own rugged Alumiflex®, you'll find it noticeably lighter than steel, yet strong enough to rack even the heaviest equipment. When choosing the OD-UL series, you have handpicked the highest value in American construction. The OD-UL series includes the standard features you have come to expect with DDB, incorporating the versatile R-Strut system for adjustable racking, the security of a 3- point locking system, our patented Alumishield® solar cap to manage heat loads, UL listed bonding straps, & UL listed gasketing. For those who need more than just our standard enclosure, DDB can also make a truly customized solution with our many available options including HVAC, providing a climate-controlled environment for any electronic equipment, electrical load panels and cable entry solutions to name a few. All of this comes together to create an enclosure able to meet all of the unique needs your customers have been seeking. DDB offers a state-of-the-art design, a competitive price, benchmark lead times and a guaranteed delivery, all backed up with an industry leading 15-year warranty on every enclosure. Put DDB's substantial stock to work for you today. Contact our professional staff to assist you with your made-to-order solution.

Application Types

Telecommunications
Wireless/Broadband
Fiber Optics
Back Haul
Small Cell/DAS
Public Safety
Utility
Base Station
Military
Trailer-Based Communications
Wi-Fi
LTEE/4G/5G



Environmental & Safety Ratings:

- ✓ ETL environmentally listed to UL 50/50E, IP 66, Type 4
- ✓ ETL listed; Safety Requirements, UL 62368-1:2019 Ed.3, CSA C22.2





0.125" Aluminum Construction
Stainless Steel External Hardware/Hinge

Fully Welded Construction

3 Point Lock System

Front and Rear Access

Custom Colors Available

Cream Powder-Coat in Stock

Flexible and Scalable

15 Year Warranty

Quick Shipping

Water/Rain/Sleet/Dust Tight

Weight and Dimensions

Approximate Exterior Enclosure Dimensions:

63"H x 28"W x 39"D

Shipping Dimensions:

35"W x 45"L - Palletized

Approximate Shipping Weight:

201 lbs.

2301 S. HWY 77 Pauls Valley, OK 73075 T: (800) 753-8459 – F: (877) 220-7236 sales@ddbunlimited.com www.ddbunlimited.com



OD-UL Series OD-62DDC-UL50





2301 S. HWY 77 Pauls Valley, OK 73075 T: (800) 753-8459 – F: (877) 220-7236

sales@ddbunlimited.com www.ddbunlimited.com

c C Justico Use Intertek

Installation, operating and safety instructions can be downloaded here





Scan this code for replacement parts



Features

- 1. Solar Shield (Alumishield)
- 2. 2 Sets of 19" Adjustable Racking Rails
- 3. 33 Racking Units, 66 RU's available
- 4. Rear Access Door
- 5. 3 Point Locking System
- 6. Bonding Strap UL Listed
- 7. Frame Gasket UL Listed

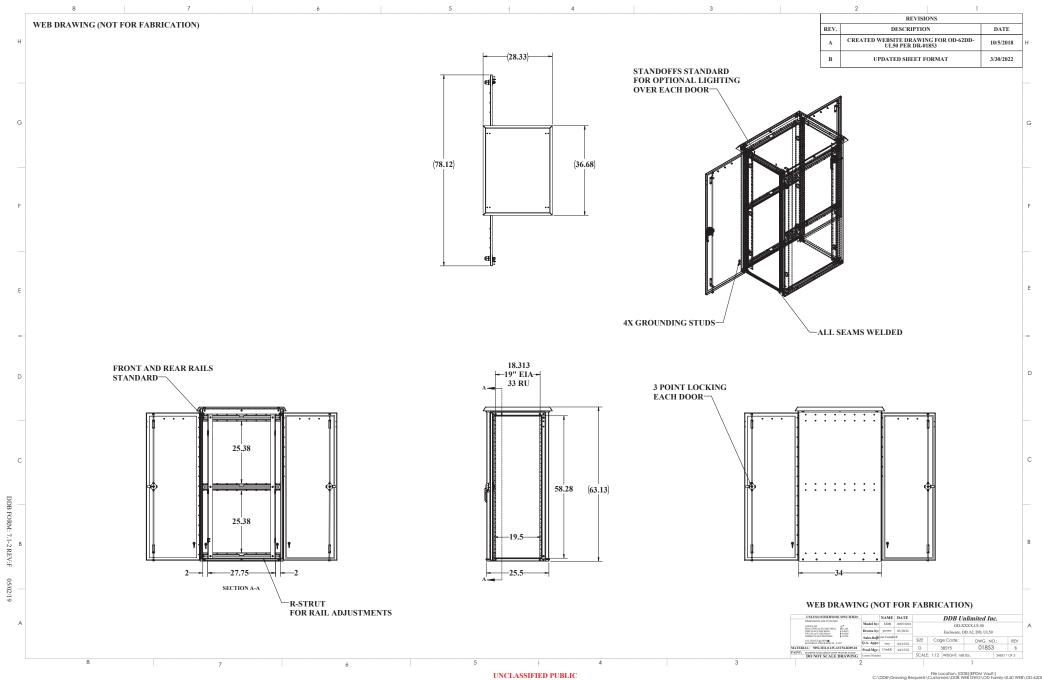

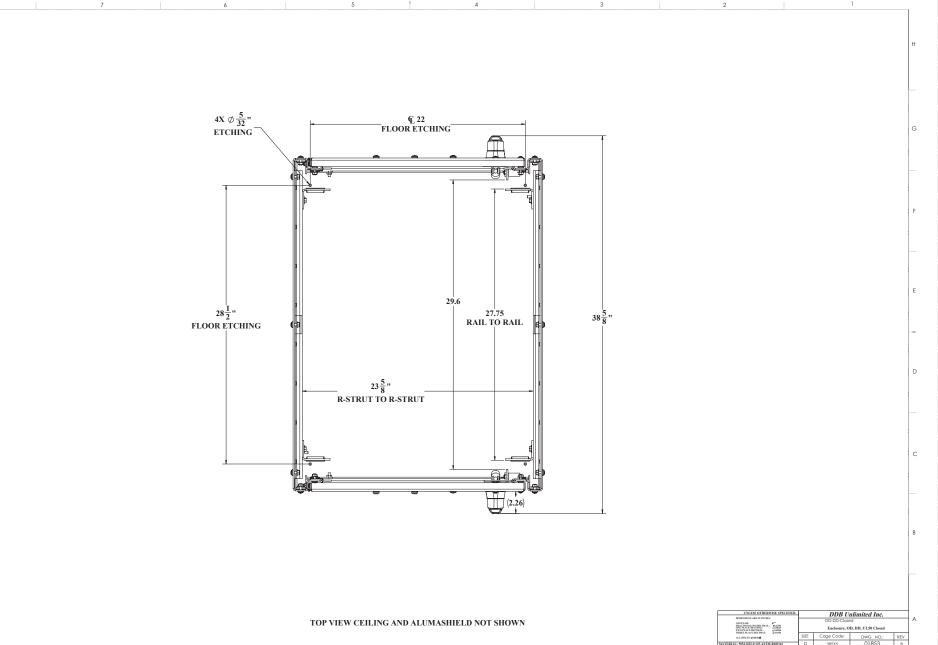

UNCLASSIFIED PUBLIC

DDB FORM: 7.1-2 REV:K 08/02/17

File Location: (DDB) (EPDM Yault:)
C:\DDB\Drawing Requests\Customers\DDB WEB\DWG\OD Family-UL50 WEB\OD-62DD-UL50

