

20D Series

20D-62DXC



Why Choose the 20D Series?

When a single bay solution just isn't sufficient, the 20D series enclosures are ideal. Constructed of our own rugged Alumiflex®, it is noticeably lighter than steel yet strong enough to rack the heaviest equipment. The 20D-62DXC includes a number of standard features, such as an adjustable racking system with a versatile rail strut system (R-Strut), a 3-point locking system for security, a reversible rack system for 19" and 23" applications, lifting hooks for easy maneuvering into place, wind locks to secure doors safely when they are open, and our patented Alumishield® solar cap for managing heat loads. Furthermore, DDB offers an array of customizable choices, which include climate control (HVAC), electrical load panels, and cable entry solutions. These possibilities combine to produce an enclosure that can be customized to meet the specific needs that your site and clients may require. The 20D undoubtedly closes the gap between single-bay enclosures and larger building "hut" solutions, giving you the flexibility to meet any need in the field without the required stamps or inspections that traditional "huts" do. With an industry-leading 15-year warranty on every enclosure, DDB provides cutting-edge design, competitive pricing, benchmark lead times, and guaranteed delivery. Whether you require a custom enclosure or something from our substantial stock, our professional staff is here to help you today.



Application Types

- Telecommunications
- Wireless/Broadband
 - Fiber Optics
 - Back Haul
 - Public Safety
- Utility
- Base Station
- Military
- Trailer-Based Communications
 - Wi-Fi
 - LTEE/4G/5G



Environmental & Safety Ratings:

- ✓ NEMA 3R (shown above)
- ✓ NEMA 4 and 4X configurable (not shown)

Features

- 15 Year Warranty
- 0.125" Aluminum Construction
- 3 Point Lock System
- Heavy Duty Out-Door Construction
- Front and Rear Access
- Standard Lifting Hooks
- Stainless Steel External Hardware/Hinge
- Cream Powder-Coat, Standard
- Quick Shipping

Weight and Dimensions

Approximate Exterior Enclosure Dimensions:

64"H x 65"W x 30"D

Shipping Dimensions:

82"L x 54"W x 72"H - Palletized

Approximate Shipping Weight:

455 lbs.

2301 S. HWY 77 Pauls Valley, OK 73075

T: (405)-665-2876

sales@ddbunlimited.com www.ddbunlimited.com

20D Series

20D-62DXC



Features

1. Alumishield
2. 19" and 23" Adjustable Racking Rails
3. 3 Point Locking System
4. Stainless Steel Door Hinge
5. Powder-Coat Cream
6. Wind Locks
7. Rear Door Access
8. Reusable Filters
9. Heavy Duty 0.160" Doors

Scan this code for
Climate Control



Scan this code for
Accessories




2301 S. HWY 77 Pauls Valley, OK 73075

T: (405)-665-2876

sales@ddbunlimited.com www.ddbunlimited.com

DDJ FORM 7.1-2 REV. 08/02/17

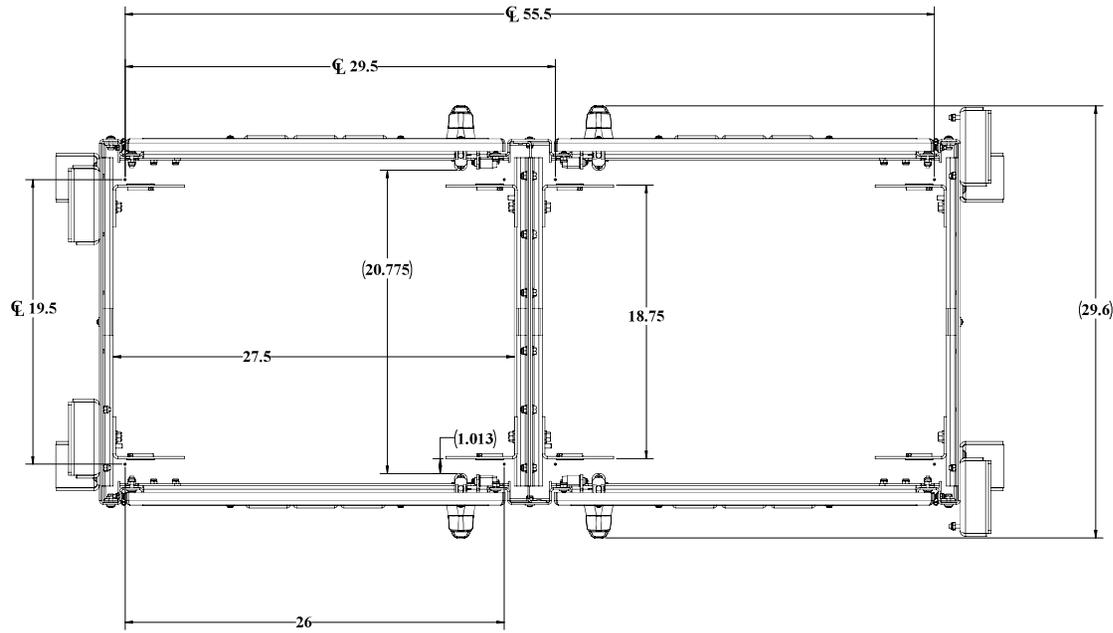

ALUMASHILD AND CEILING NOT SHOWN

UNCLASSIFIED PUBLIC

UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN INCHES			
FINISH	AS SHOWN	1"	25.4
CONCRETE	AS SHOWN	1/2"	12.7
STEEL	AS SHOWN	1/8"	3.175
GLASS	AS SHOWN	1/4"	6.35
PAINT	AS SHOWN	1/16"	1.5875
ALL DIMENSIONS TO FACE UNLESS NOTED OTHERWISE			
MATERIALS SPECIFIED BY ASTM STANDARDS			
DO NOT SCALE DRAWING			
DDJ Unlimited Inc.			
200-420X (CLOSED)			
DWG. WEB, 2019, 62, DX			
REV	Code Code:	DWG. NO.:	REV
D	28515	00966	C
SCALE: 1:8		WEIGHT: 343 lbs.	SHEET 2 OF 3

