



DDB Unlimited, Inc.

OD SERIES

LTEE-ACP-1



Best Warranty in the Industry

Why Choose the LTEE Series?

The LTEE series enclosure is the ultimate choice for your outdoor equipment racking applications. Being constructed of our Alumiflex® material, you'll find it noticeably lighter than steel, yet strong enough to rack even the heaviest equipment. When you choose the LTEE series, you are selecting the highest value and most feature rich enclosure offered. With many standard features including HVAC, climate control, electrical load panel and side spool cabinet. The LTEE is ready to make installation and startup as easy as possible. Other standard features such as our versatile "R- strut system", for adjustable racking and the security of the 3 point locking system are quality features you have come to expect from the DDB name. The LTEE series.... a state of the art, feature rich design at a competitive price with benchmarked leading delivery times.

Application Types

Provides a secure, climate controlled environment for any electronic equipment.

- Telecommunications
- Wireless/Broadband
- Fiber Optics
- Backhaul
- Base Station
- Small Cell/DAS
- Utility - Traffic
- Trailer-based Communications
- Wi-Fi
- Flexible and Scalable

Industry Standards

- NEMA 3R, 4 or 4X
- ETL Certified to UL standard 60950-1/CSA 22.2C

Base Cabinet Weight and Dimensions

Exterior Cabinet Dimensions
80"H x 25"W x 34"D

Approximate Weight
Raw 505 lbs. / Shipping 580 lbs.

Shipping dimensions
45" x 60" x 86"
(ships on pallet)

Features

- Heavy duty outdoor construction with Front and Rear Access, Pad Mountable, and 0.125" Aluminum construction.
- 27 Rack Units (RU) - 19" (standard) or 23" (optional) Racking Rails w/ Etched RU Markings and cable pass-through holes
- SS External Hardware and Polypropylene filters



2301 S. Hwy. 77 Pauls Valley, OK 73075
T: (800) 753-8459 • F: (877) 220-7236
sales@ddbunlimited.com
www.ddbunlimited.com






Features

1. Included Four Square Outlet & Junction Box With 220 Leads
2. Front and Rear set of adjustable 19" racking
3. Interior Light
4. Dual 48V Fan Kit with Adjustable Thermostat
5. 2 Sets of 3 Pole Alarm Switches



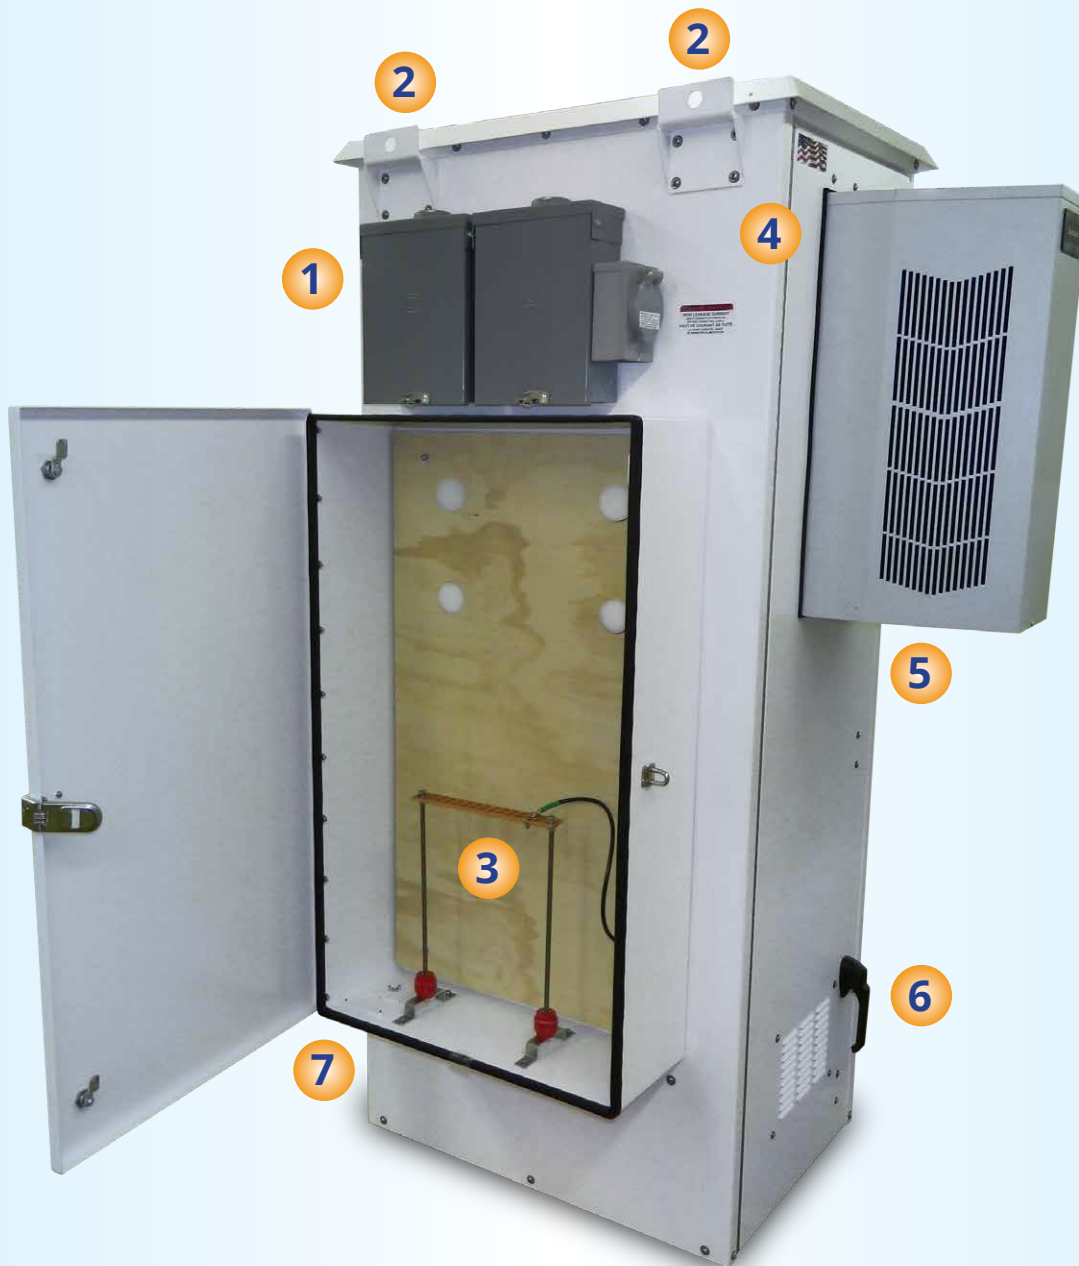


Features

1. 100 Amp Dual Panel AC Power Load Center Configuration with 50amp Back-up Generator Plug
2. Lifting Hooks
3. 12" Copper Ground Bar on 14" Risers with Isolators
4. ACP-4000-N28-1(2): 4000 BTU 110V AC Unit, 1300 Watts of Heat
5. 3 Point Pad Locking Handle for Top Compartment
6. Single Pad Locking Handle for the Bottom Compartment
7. Side Box 45"H x26"W x10"D with Removable Plywood Backplate with a Total of (5) 2" Cable Pass Through Openings



OD SERIES LTEE-ACP-1

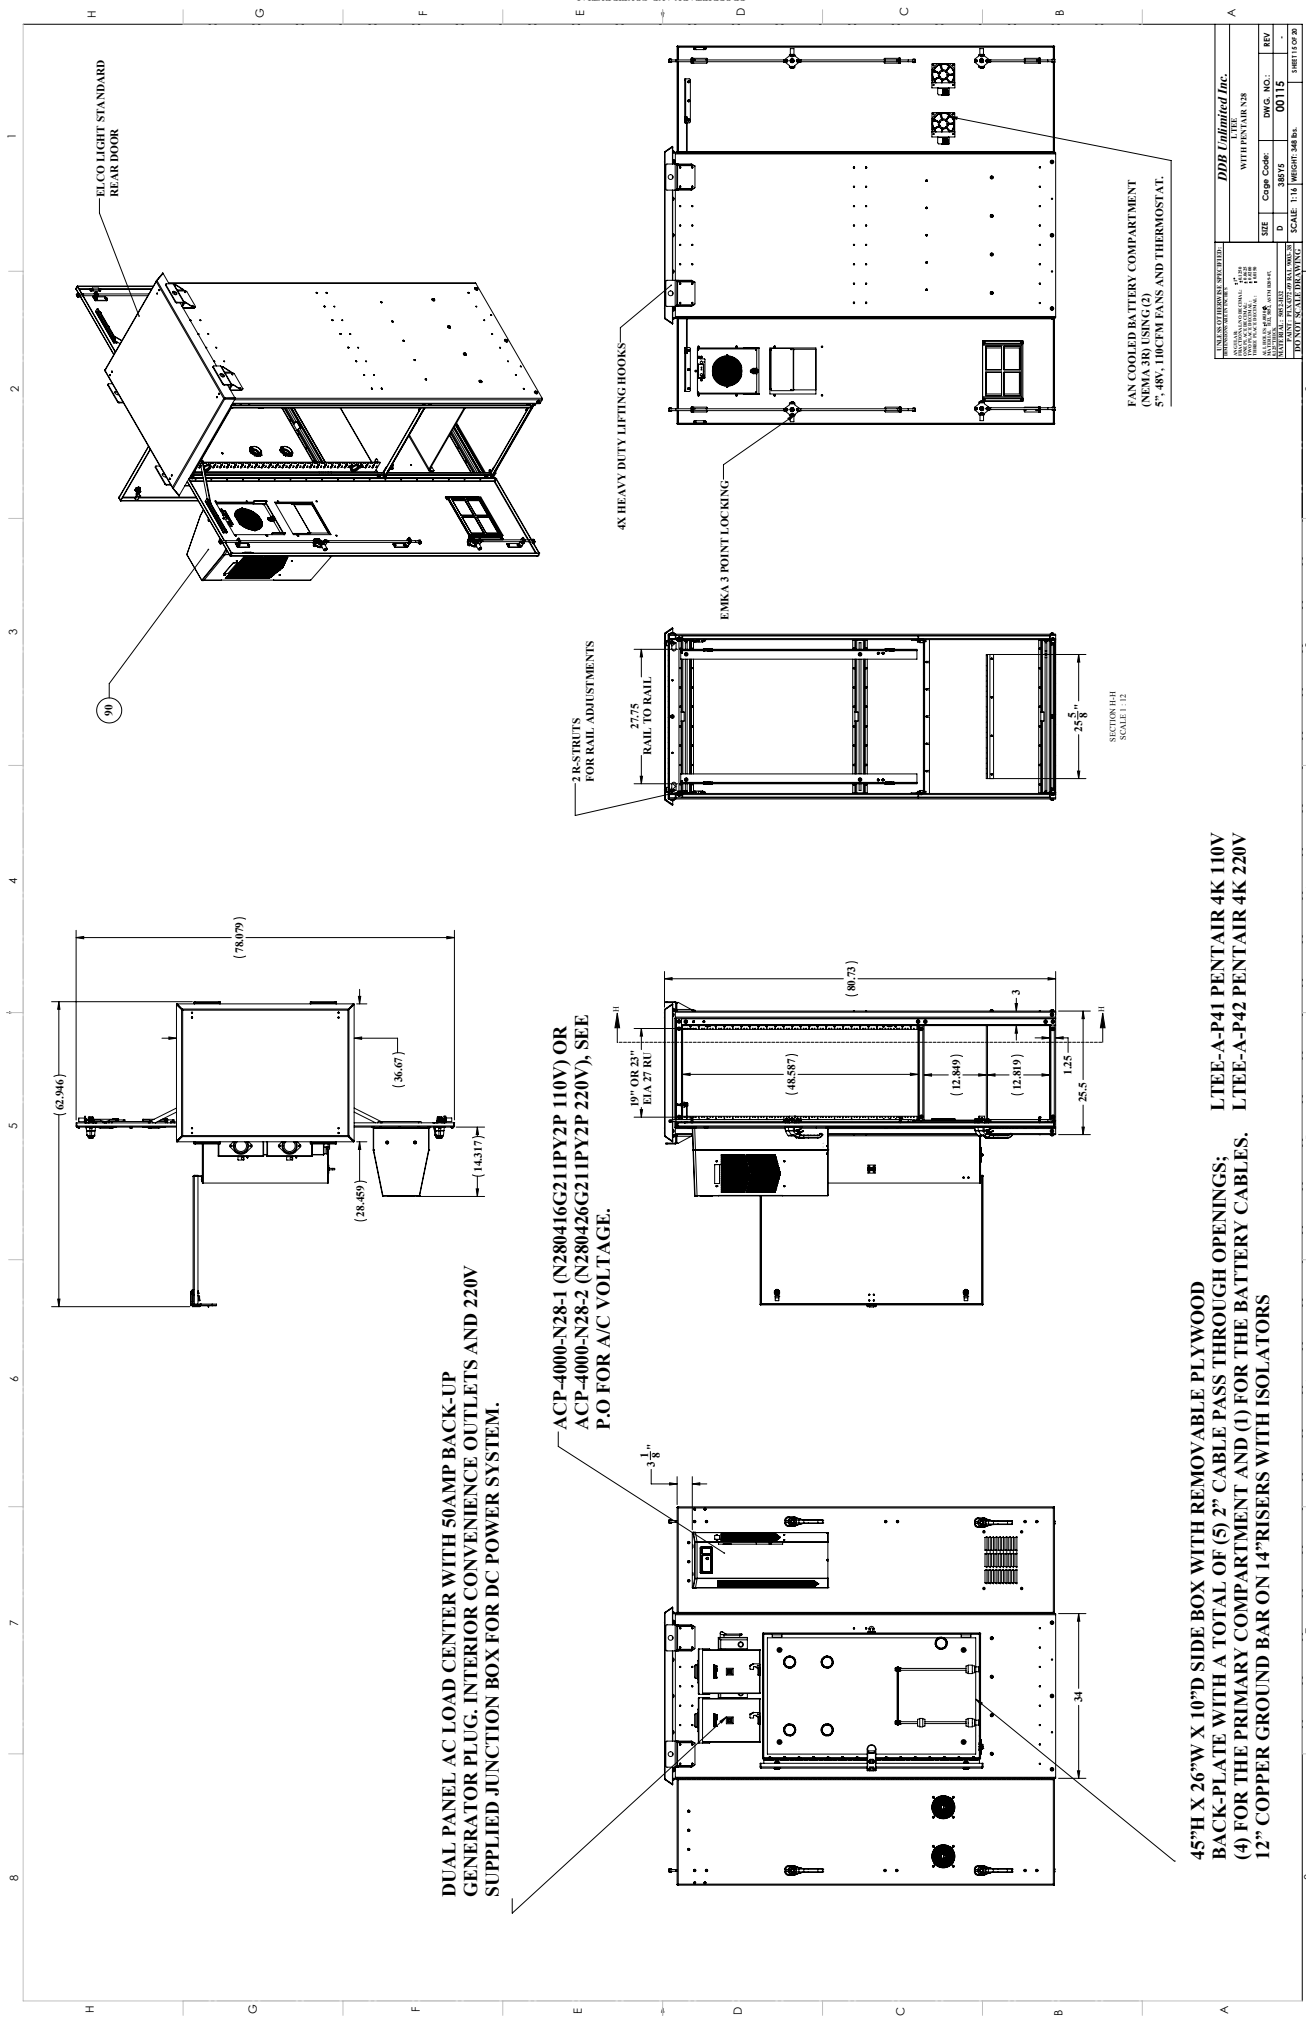

GENERAL INFORMATION SHEET	
PROJECT NO.	DATE
REV.	DATE
SIZE	DWG. NO.
D	3885
SCALE: 1/4" = 1'-0" (HEIGHT 3/8")	
DDB UNLIMITED Inc.	
L100	
WITH PENTAIR 4K	
REV.	
DWG. NO.	
00115	
SHEET 1 OF 2	

